



MODEL: SBM25.6LI100

NO:

Container Color		Plane Chart:	
	PANTONE		
		3516C	
		Black C	
	Terminal type	LC5	
	100 A	BMS	
	20241023	Time	
Function	(NO) Digital Display (YES) Bluetooth	Product Size: 522*240*222mm	

Parameter Chart:

Rated Voltage	25.6	V
Rated Capacity(25°C)	100	Ah
Series & Parallels	8 ~ 1	S/P
Voltage Range	18.4 ~ 29.2	V
Rated Energy	2560	Wh
Maximum Discharge Current	100	A
Maximum Charge Current	100	A
Discharge cut-off voltage	≥ 18.4	V
Charge voltage	29.2	V
Cycle life(@25°C ,100%DOD)	≥ 3000	Cycle
Float Voltage	27.2 ~ 27.6	V
Operating humidity	60 ± 25%	R.H.
Certified	CE/UN38.3	
Communication	/	
Total Weight	Approx. 19.60 ± 0.20	Kg
Operating temperature	Charging 0 ~ 45°C Discharging -20 ~ 55°C	

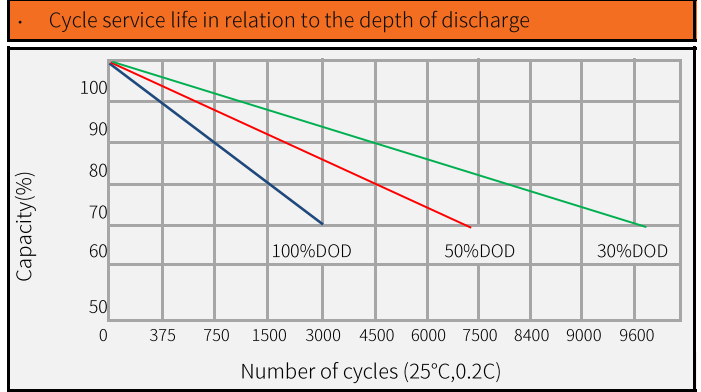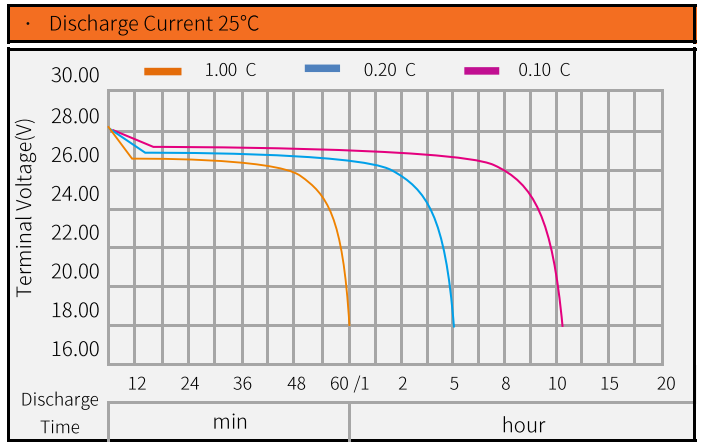

Long-term Storage

After the battery is charged, it should be used as soon as possible to avoid loss of usable capacity due to self-discharge.


If storage is required, the battery needs to be stored in a low SOC state. The recommended storage conditions are: 20%~40%SOC, 0°C~35°C, relative humidity ≤60%.

Constant Current Discharge Characteristics (A, 25°C)

Time(h)	1.00	2.00	4.00	5.00	8.00	10.00	15.00	20.00
Current (A)	100.00	50.00	25.00	20.00	12.50	10.00	6.67	5.00

Constant Power Discharge Characteristics (Watt, 25°C)

Time(h)	1.00	2.00	4.00	5.00	8.00	10.00	15.00	20.00
Watt (W)	2560.0	1280.0	640.0	512.0	320.0	256.0	170.7	128.0

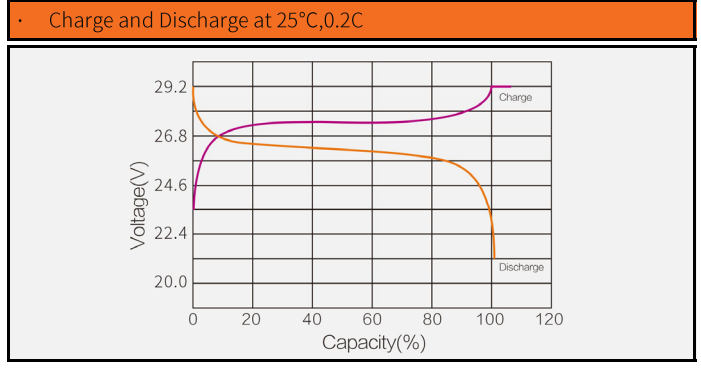

Capacity Factors With Different Temperature

Discharge	-20	-10	0	10	20	25	30	40	50	55	60
	≥55	≥70	≥90	≥95	≥100	≥100	≥100	≥98	≥97	≥95	≥93

- Matters needing attention**
- ★ The above parameters are for reference only. The accurate parameters shall be based on the actual production order.
 - ★ During usage, it is strictly prohibited to reverse the positive and negative terminals of the battery.
 - ★ Please use a special charger for lithium-ion batteries when charging.
 - ★ If series or parallel connection is required, please consult the agent or manufacturer.