



GLOQ1-100 Outline Installation dimensions

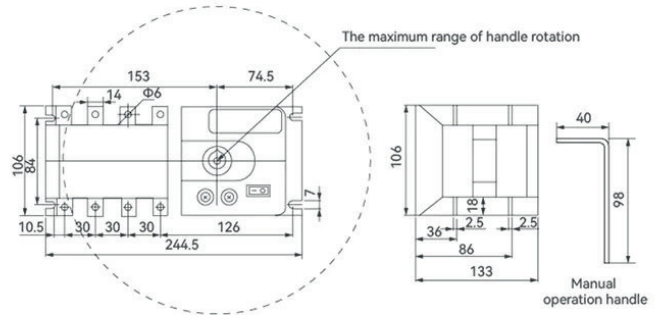




GLOQ1 -125~1600 Outline Installation dimensions

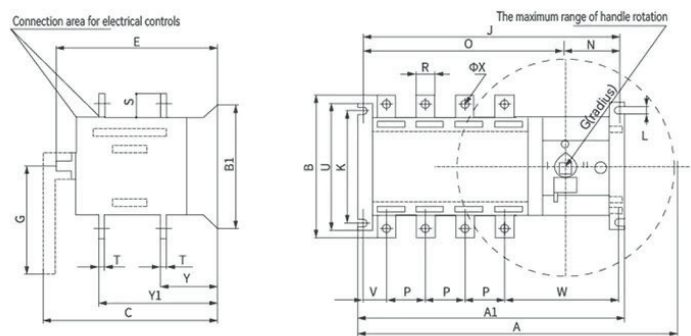

Specification	A	A1	B	B1	C	E	G	J	K	L	N	O	P	R	S	T	U	V	W	ΦX	Y	Y1	K1
160A/4	358	320	150	134	190	157	144	305	78/108	7	100	211	36	20	25	3.5	134	33.5	160	9	58	122	80/50
250A/4	422	381	186	134	210	180	144	365	78/108	7	98	270	50	25	30	3.5	134	47	164	11	61	144	80/50
400A/4	520	445	240	208	333	266	192	422	176	11	113.5	315	65	32	40	5	208	31	193	11	83	193	
630A/4	520	445	260	208	333	266	192	422	176	11	113.5	315	65	40	50	6	208	31	193	13	84	194	
800A/4	1007	633	340	250	370	321	470	609	220	11	85	524	120	80	70	8	220	60.5	188.5	13	110	258	
1000A/4	1007	633	340	250	370	321	470	609	220	11	85	524	120	80	70	8	220	60.5	188.5	13	110	258	
1250A/4	1007	633	340	250	370	321	470	609	200	11	85	524	120	80	70	8	220	60.5	188.5	13	110	258	
1600A/4	1007	633	340	250	370	321	470	609	200	11	85	524	120	80	80	12	220	60.5	188.5	13	114	262	

GLOQ1-2000A~3200A Outline Installation dimensions

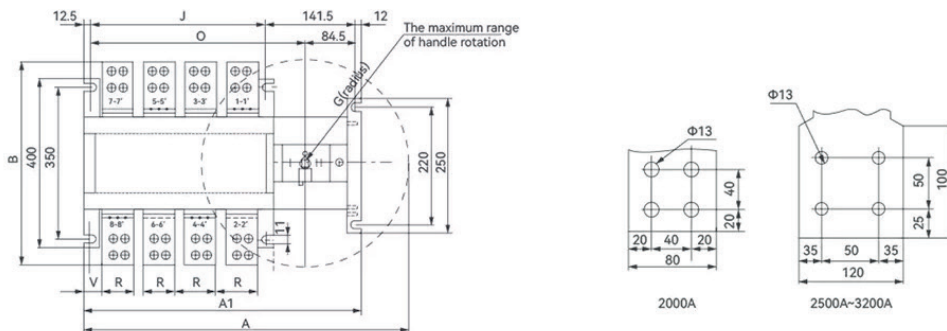

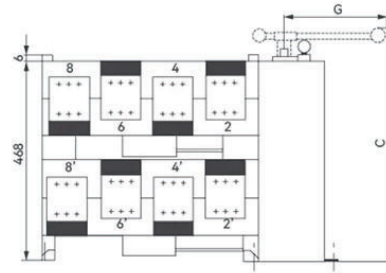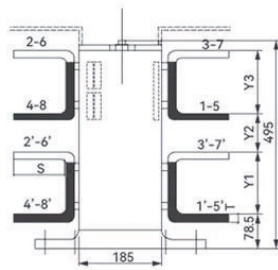

Specification	Overall size							switch installation					Terminals										
	A	A1	B	C	E	G	H	J	K	L	N	O	P	R	S	T	U	V	W	X	Y1	Y2	Y3
2000A	1007	633	455	556		470		467				524		80	80	15		33			147	84	147
2500A	1007	633	455	556		470		467				524		120	112	15		13			152	79	152
3200A	1007	633	505	556		470		467				524		120	112	15		13			152	79	152

