

Steca Solsum 0606 | 0808 | 1010

The Steca Solsum generation is one of the most successful and most frequently used charge controllers in solar home systems. With load currents of up to 10 A with automatic switching from 12 V or 24 V, it is ideally suited for devices with up to 240 W power.

The printed circuit board is completely electronically protected and the LED display allows the battery status to be easily read. The connectors allow solar panels, battery and load to be connected easily. The Steca Solsum F operates as an energy-efficient series controller based on PWM.

Product features

- Serial topology with MOSFETs
- Automatic detection of voltage
- Voltage regulation
- PWM control
- Multistage charging technology
- Current compensated load disconnection
- Automatic load reconnection
- Temperature compensation
- Negative earthing of one or positive earthing of several terminals possible
- Monthly equalisation charge

Electronic protection functions

- Overcharge protection
- Deep discharge protection
- Reverse polarity protection of module (≤ 36 V), load and battery
- Automatic electronic fuse
- Short circuit protection of load and module
- Overvoltage protection at module input
- Open circuit protection without battery
- Reverse current protection at night
- Overtemperature and overload protection
- Load disconnection on battery overvoltage

Displays

- Multifunction LED display
- Multi-coloured LED
- 4 LEDs show operating states
- for operation, state of charge, fault messages

Options


- Evening or night light function pre-set in the factory or adjustable via Steca PA RC 100
- Parameterisation of function values via Steca PA RC 100

Certificates

- Compliant with European Standards (CE)
- RoHS compliant
- Made in EU
- Manufactured according to ISO 9001 and ISO 14001

Accessories

- Steca PA RC100

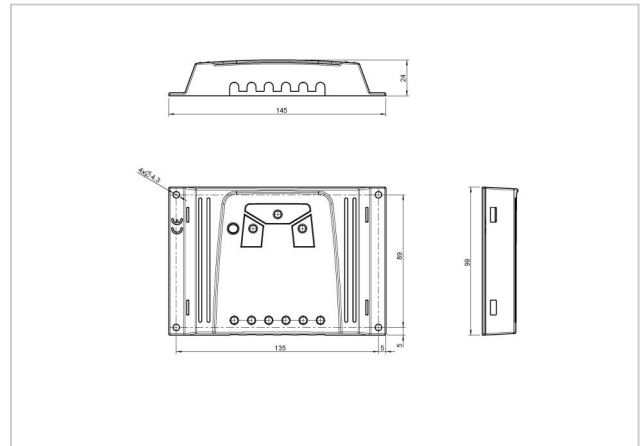

	0606	0808	1010
Characterisation of the operating performance			
System voltage	12 V (24 V)		
Own consumption	< 4 mA		
DC input side			
Open circuit voltage solar module (at minimum operating temperature)	< 47 V		
Module current	6 A	8 A	10 A
DC output side			
Load current	6 A	8 A	10 A
Reconnection voltage (LVR)	12.4 V ... 12.7 V (24.8 V ... 25.4 V)		
Deep discharge protection (LVD)	11.2 V ... 11.6 V (22.4 V ... 23.2 V)		
Battery side			
End-of-charge voltage	13.9 V (27.8 V)		
Boost charge voltage	14.4 V (28.8 V)		
Set battery type	gel		
Operating conditions			
Ambient temperature	-25 °C ... +50 °C		
Fitting and construction			
Terminal (fine / single wire)	4 mm ² / 6 mm ² - AWG 12 / 9		
Degree of protection	IP 31		
Dimensions (X x Y x Z)	145 x 100 x 30 mm		
Weight	ca. 150 g		

- Technical data at 25 °C / 77 °F
- adjustable via Steca PA RC100: reconnection voltage, deep discharge protection, end of charge voltage, boost charge voltage, battery type
- Inverters must not be connected to the load output.