



Solar Series-Tubular Gel 16 OPzV2000(2V2800Ah)




Specifications

Rated Voltage	2V	
Nominal Capacity	2800Ah	(C ₁₀₀ , 1.80V/cell)
Dimension	Length	399mm(15.71 in.)
	Width	214mm(8.42 in.)
	Container Height	772mm(30.39 in.)
	Total Height	807mm(31.77 in.)
Approx Weight	155.0Kg (341.72 lbs)	
Terminal	M8	
Container Material	ABS	
Rated Capacity (25°C)	2892.0 Ah	(120hr, 24.1A, 1.80V/cell)
	2800.0 Ah	(100hr, 28.0A, 1.80V/cell)
	2678.4 Ah	(72hr, 37.2A, 1.80V/cell)
	2240.0 Ah	(10hr, 224.0A, 1.80V/cell)
Max. Discharge Current (5s)	16000A	
Internal Resistance(25°C)	Approx.0.28mΩ	
Operating Temp.Range	Discharge	-20°C~55°C (-4°F~131°F)
	Charge	0°C~40°C (32°F~104°F)
	Storage	-20°C~50°C (-4°F~122°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max.Charging Current(25°C)	500.0A	
Charge voltage(25°C)	Float	2.25V
	Temp. Coefficient	-3mV/cell/°C
	Cycle(Equalization)	2.35~2.40V
Effect of temp. to Capacity	40°C (104°F)	106%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	≤3% per month at 25°C	



Layout

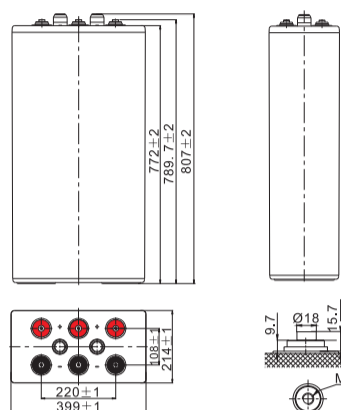

Constant Current Discharge (Amperes) at 25 °C (77° F)

F.V/Time	1h	2h	3h	5h	8h	10h	24h	48h	72h	100h	120h
1.85V/cell	904.4	610.1	474.6	326.6	244.2	209.4	93.0	49.8	35.8	27.2	23.4
1.80V/cell	1018.5	669.9	515.6	352.8	262.1	224.0	97.1	51.7	37.2	28.0	24.1
1.75V/cell	1093.1	688.8	527.1	359.1	265.4	227.4	99.2	52.9	38.1	28.4	24.4
1.70V/cell	1167.5	726.8	554.0	375.8	268.8	229.6	100.8	53.9	38.5	28.8	24.8
1.67V/cell	1201.0	742.0	563.8	381.2	272.2	233.0	101.7	54.5	38.8	29.3	25.1
1.60V/cell	1221.5	751.7	570.2	384.5	274.4	234.1	102.5	55.1	39.1	29.6	25.4

Constant Power Discharge (Watts/cell) at 25 °C (77° F)

F.V/Time	1h	2h	3h	5h	8h	10h	24h	48h	72h	100h	120h
1.85V/cell	1749.8	1185.5	926.1	642.6	483.8	417.8	185.9	99.7	71.9	54.7	47.1
1.80V/cell	1957.6	1295.7	1002.8	690.9	517.4	444.6	193.7	103.4	74.5	56.2	48.4
1.75V/cell	2086.4	1325.1	1021.7	701.4	525.3	451.4	197.7	105.6	76.3	56.9	49.1
1.70V/cell	2215.1	1391.0	1068.1	730.1	530.9	455.8	200.7	107.6	77.0	57.7	49.7
1.67V/cell	2262.6	1413.7	1082.2	738.7	535.4	459.2	202.3	108.6	77.5	58.6	50.3
1.60V/cell	2287.4	1424.5	1090.8	744.1	538.7	462.6	203.8	109.6	78.0	59.2	50.8



Solar Series-Tubular Gel 16 OPzV2000(2V2800Ah)



Applications

- Green energy systems (solar, wind, hydro, etc)
- Telecommunications installations
- Solar power stations
- Alarm installations
- Railway crossing
- Street lighting
- Pump systems
- Signal station
- Street signs
- Traffic lights
- Lawn lamp


General Features

- 16-18 years design life(25°C)
- Better recovery performance
- Wide working temperature range (-20~55)°C
- No electrolyte stratification provides longer service life
- High recombination efficient
- Build in copper core based in lead will carry large current
- Separator imported form AMER-SIL high porosity, PVC-SiO₂ and low resistance
- Pasted negative plate special grid design increase the active material,availability large current discharge and charge ability
- Tubuler type positive plate (polyester tube) prevent the active material from falling. Multi metal alloy pressed positive grid increase the anti corrosion ability and service life


Standards

- Compliance with IEC 60896, IEC 61427, DIN 40742 standards
- UL, CE Certified
- Manufactured in Leoch®TS16949, OHSAS 18001,ISO 9001 and ISO 14001certified production facilities


Charge voltage vs ambient temperature curve

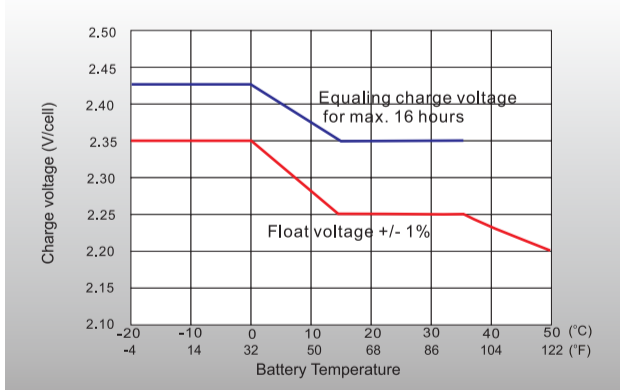


Temperature effects in relation to battery capacity

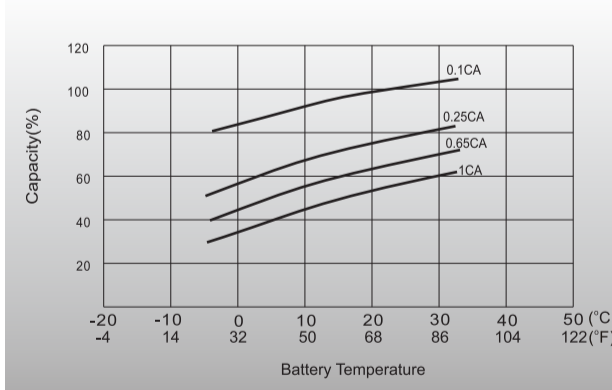

Cycle Life in Relation to DOD

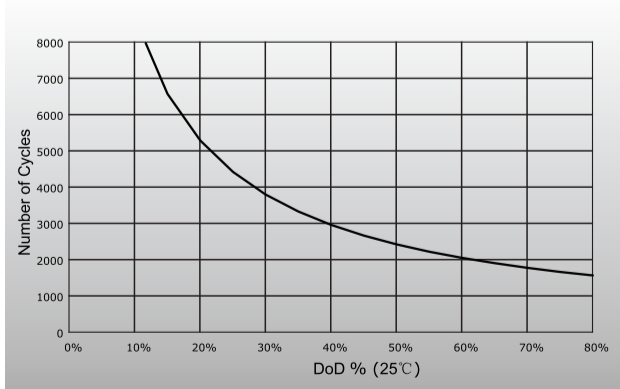

Float Service Life

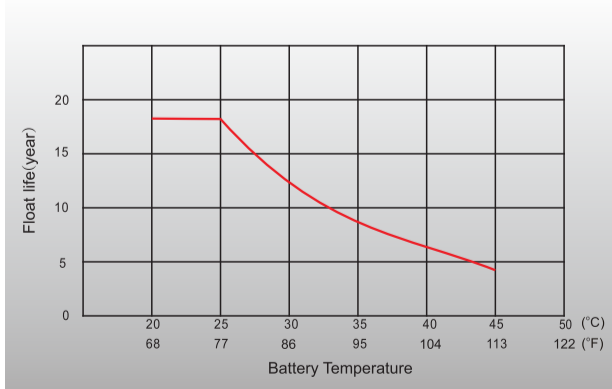

Distributor: