



EcoPulse™ Solar Charge Controllers

METERED AND NON-METERED VERSIONS

- Ideal for residential & leisure applications
- 10, 20 and 30 amp versions
- Charges 12V and 24V battery systems
- The BEST value for reliable charging in consumer applications

The EcoPulse is a pulse width modulation (PWM) solar charge controller within Morningstar's Essential Series™ of products which provides essential off-grid battery regulation functions. This controller is easy to use, and designed for residential and leisure consumer applications.* Metered and non-metered versions of this product are available at 10, 20, and 30 amp charge ratings for 12 and 24 volt battery systems.



Residential



Rural Electrification



Boating



RV, Caravan

KEY FEATURES AND BENEFITS

- **High Reliability**
Conformally coated circuit board and corrosion resistant terminals.
- **Robust Thermal Design**
Extruded aluminum heatsink dissipates heat quickly without using cooling fans.
- **Durable Casing**
High strength polycarbonate case.
- **LED Fault Indications**
Alert when short circuit, over current, high voltage, and other error conditions take place.
- **Automatic Solar Based Lighting Control**
Field adjustable dusk 'til dawn setting.
- **Adjustable Charge Settings**
Seven presets and a custom setting can be set via DIP Switches or by the meter display buttons.
- **Adjustable Load Control**
Load control can be adjusted via meter display.
- **Optional Meter**
Multi-lingual interface with scroll buttons to adjust the settings and display metrics.



Technical Specifications

| | | |
|---------------------------------|---|--------------------|
| Electrical | | |
| Nominal Battery Voltage | 12V or 24V auto-detect | |
| Battery Voltage Range | 10-35V | |
| Voltage Accuracy | <= 0.1% +/- 50mV | |
| Maximum Battery Current | 10A, 20A or 30A | |
| Maximum PV open-circuit voltage | 60V | |
| Load Current Rating | 10A, 20A or 30A | |
| Self-Consumption | <15mA; <20mA (meter) | |
| LED Indications | (1) status, (3) Battery state of charge | |
| Transient Surge Protection | 1500 Watts (solar, battery, load) | |
| Environmental | | |
| Operating Temperature Range | -40°C to +45°C | |
| Humidity | 100% Non - condensing | |
| Tropicalization | conformal coating, marine-rated terminals | |
| Mechanical | | |
| Dimensions (W x L x D) | 15.3 x 10.5 x 5.5 cm | 6.0 x 4.1 x 2.2 in |
| Weight | 0.4 kg | 1.0 lbs |
| Enclosure | IP20, Type 1 | |
| Certifications | CE, TUV Listed: IEC 62109 | |
| Versions (6) | EC-10 EC-10M EC-20 EC-20M EC-30 EC-30M | |
| Warranty | 2 years | |

Electronic Protections

- Solar Input: overload, short-circuit, high voltage, reverse polarity, high temperature, nighttime reverse current
- Load Output: overload, short-circuit, high temperature, reverse polarity
- Battery: reverse polarity

Battery Charging

- 4-Stage Charging: Bulk, Absorption, Float, Equalize
- Temperature Compensation Coefficient: -30mV/°C/12volt
- Set-points: Absorption, Float, Equalize, HVD

Load & Lighting Control

- Low Voltage Disconnect, Low Voltage Reconnect
Settings: 11.4V / 12.6V or Custom (x2 for 24 volt systems)
- Lighting Settings: Dusk to Dawn


Meter

- Resolution: 128 x 64 pixels
- Viewing Area: 5.0 cm x 2.5 cm
- Interactive: Yes

Accessories

- Remote Temperature Sensor (RTS)

1. Charging Status / Error LED
2. Meter Display (optional)
3. Battery Status / Fault LED Indicators
4. Solar Positive and Negative Terminals
5. Remote Temperature Sensor Terminals (RTS)

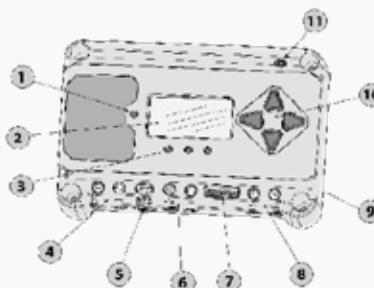

6. Battery Positive and Negative Terminals
7. DIP Switches
8. Load Positive and Negative Terminals
9. Heatsink
10. Meter Directional Buttons
11. Local Temperature Sensor

*The EcoPulse has not been certified to comply with **USA** and **Canada** electrical codes.



Visit Our Website
www.maxima.solar



Call Us
 +971 4 2231185



Our Address
 Shop 5&6, 7 States building Baniyas
 Square, Deira, Dubai, UAE