


## SKP-5SP25-3

### 5HP Product advantage

- Stainless steel: AISI 304 (316 optional)
- BLDC High Efficiency Motor
- MPPT Efficiency Max.98%
- Double shielded water filled motor
- Soft start running make system life longer
- Wide voltage:90-380Vmp/440VOC
- Dry protection
- Reverse protection
- Over-head protection
- Over-load
- Over-current
- Over-voltage protection
- Error reporting
- Losing-Phase protection
- Over temperature protection
- GPRS (Optinal)
- Voltage / Current/ Power/RPM/Controller temperature Display



## SKP-5SP25-3 MOTOR 5 HP Centrifugal Pump

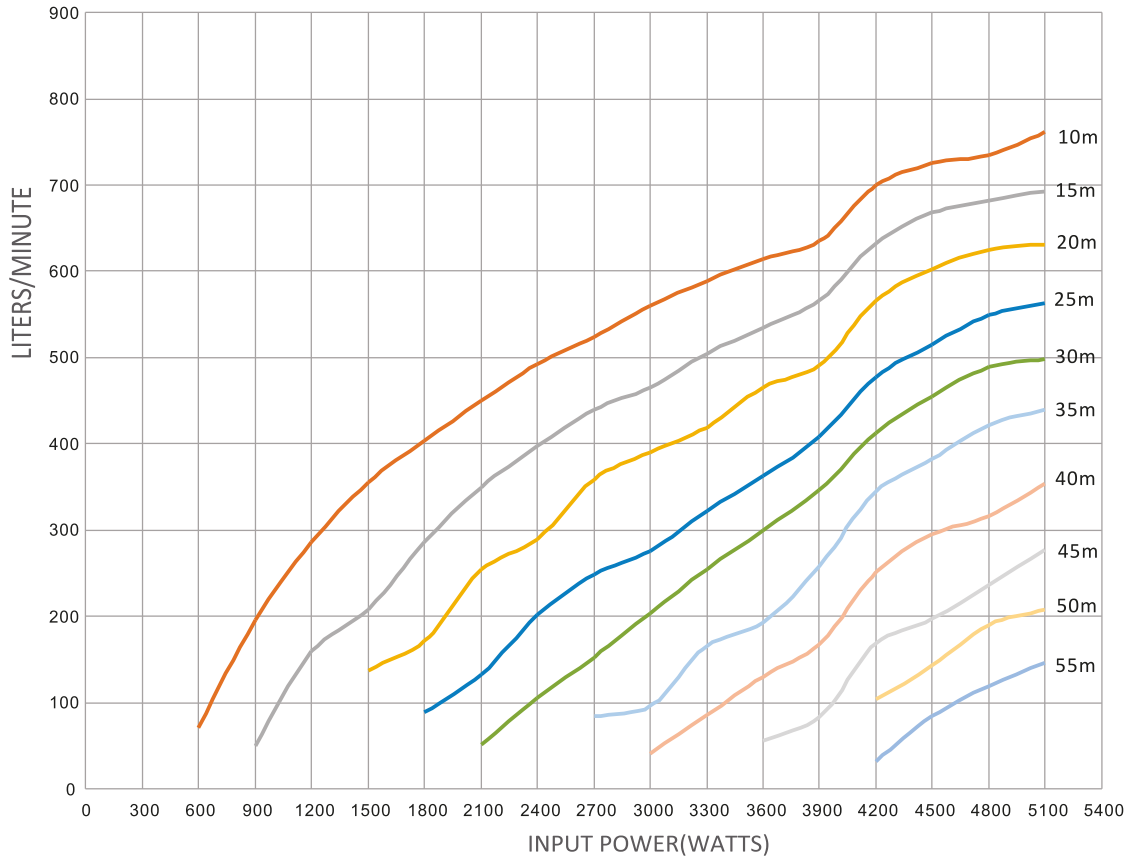

HEAD (m)	INPUT POWER (WATTS)																
	600	900	1200	1500	1800	2100	2400	2700	3000	3300	3600	3900	4200	4500	4800	5100	
10	71	195	286	355	404	450	493	524	561	589	614	635	700	725	735	762	
15		49	159	208	285	350	397	439	465	505	534	566	633	668	682	693	
20				137	171	254	289	359	390	419	465	491	566	603	625	631	
25					88	132	201	249	276	322	362	408	478	516	549	563	
30						50	105	152	204	255	299	346	412	455	489	498	
35								84	96	166	193	258	344	382	422	439	
40									41	85	130	168	251	295	316	354	
45											55	83	168	197	236	278	
50													103	143	190	208	
55														32	84	119	146


Flow max	Head max	DC voltages range	AC voltages range	Motor frequency
875L/min	60m	90-380Vmp (90-440VOC)		
PV	Connection	Max input power	Outlet size	Motor size
300W*2*8	2 Way parallel	5.1kW	2.5"	4"
Volume	Gross weight	Net weight	Pump Length	Pump diameter
0.9m*0.15m*0.24m 0.42m*0.3m*0.25m	30.5KGS	24.5KGS	0.75m	5"



# SKP-5SP25-3 MOTOR 5 HP Centrifugal Pump

## 5HP WIRING

Panel  
(2 way parallel connection  
60-380Vmp/440VOC)

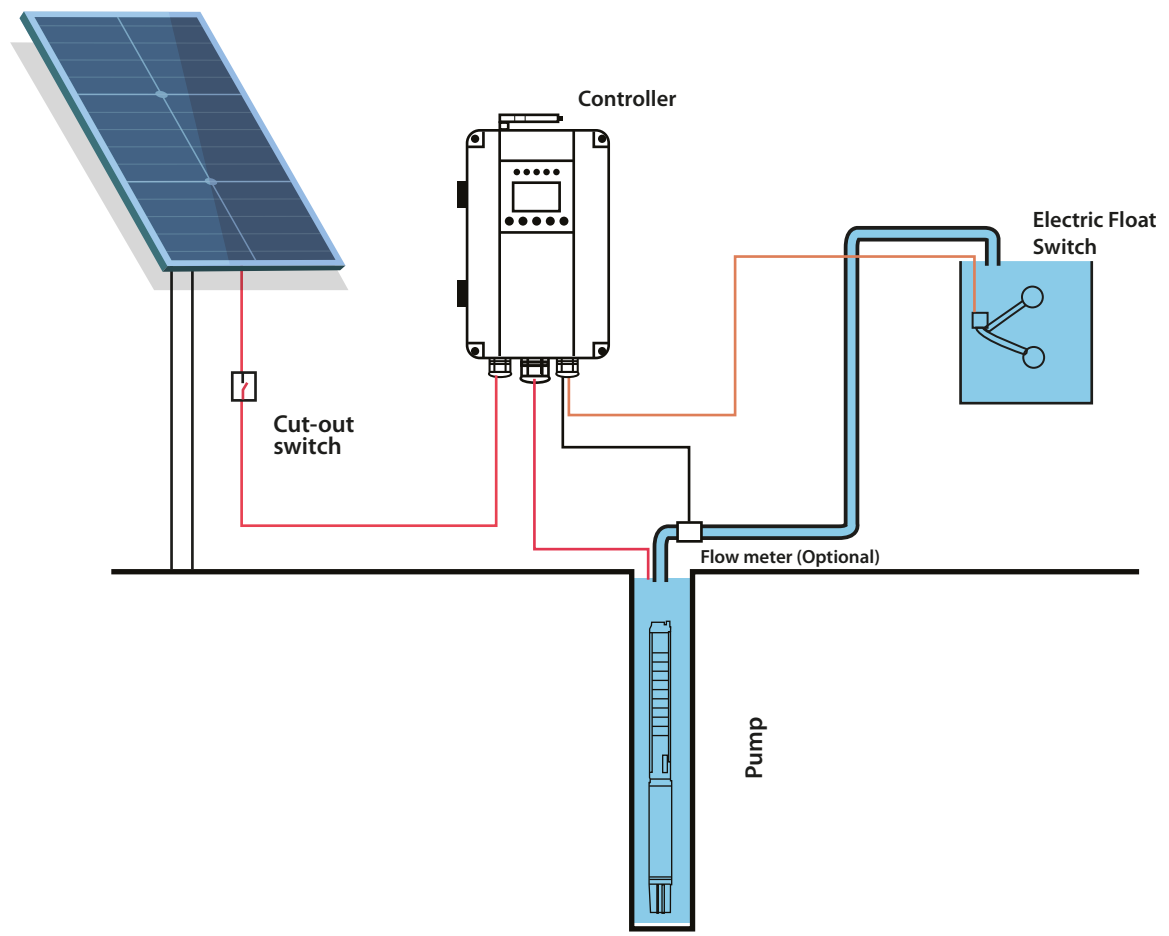

Visit Our Website  
[www.maxima.solar](http://www.maxima.solar)



Call Us  
+971 4 2231185



Our Address  
Shop 5&6, 7 States building Baniyas  
Square, Deira, Dubai, UAE