


SKP-5SP3-33

5HP Product advantage

- Stainless steel: AISI 304 (316 optional)
- BLDC High Efficiency Motor
- MPPT Efficiency Max.98%
- Double shielded water filled motor
- Soft start running make system life longer
- Wide voltage:90-380Vmp/440VOC
- Dry protection
- Reverse protection
- Over-head protection
- Over-load
- Over-current
- Over-voltage protection
- Error reporting
- Losing-Phase protection
- Over temperature protection
- GPRS (Optinal)
- Voltage / Current/ Power/RPM/Controller temperature Display



SKP-5SP3-33 MOTOR 5 HP Centrifugal Pump

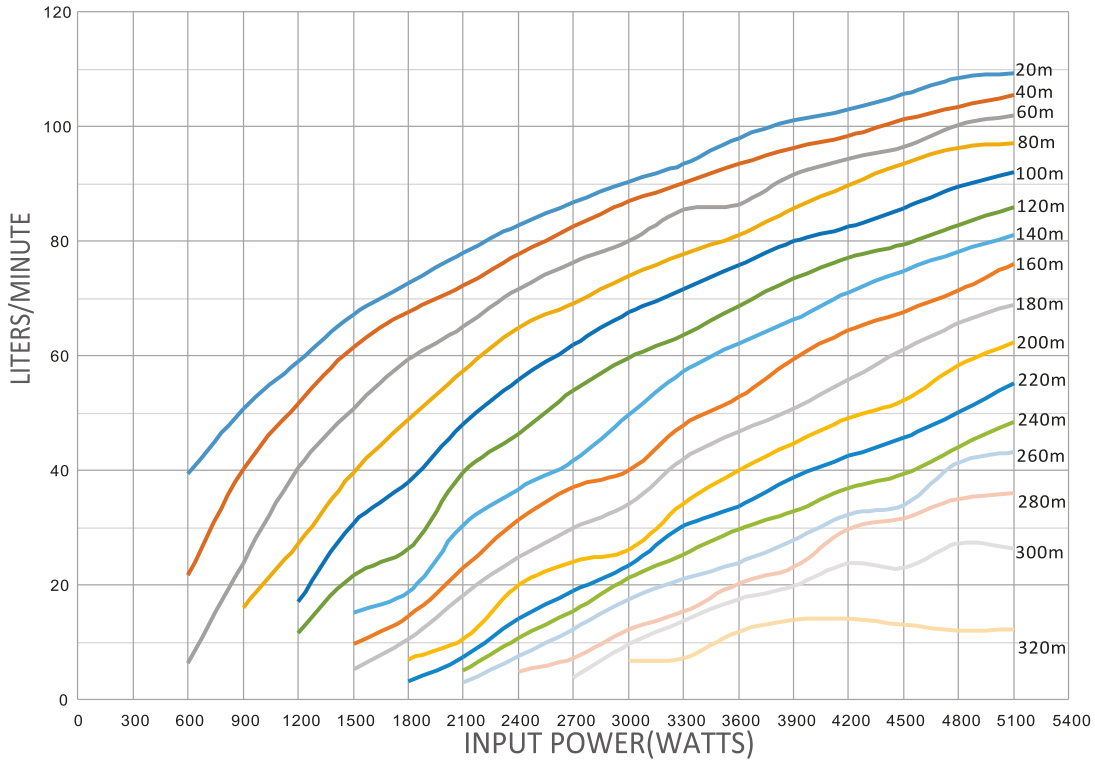

HEAD (m)	INPUT POWER (WATTS)															
	600	900	1200	1500	1800	2100	2400	2700	3000	3300	3600	3900	4200	4500	4800	5100
20	39	51	59	67	73	78	83	87	90	93	98	101	103	106	109	109
40	22	40	52	62	68	72	78	82	87	90	93	96	98	101	103	106
60	7	24	40	51	59	65	72	76	80	86	86	92	94	96	100	102
80		16	27	40	49	57	65	69	74	78	81	86	90	94	96	97
100			17	31	38	48	56	62	68	72	76	80	82	86	89	92
120			12	22	26	40	46	54	60	64	69	73	77	79	83	86
140				15	19	30	37	42	50	57	62	66	71	75	78	81
160				10	15	23	31	37	40	48	53	59	64	68	71	76
180				5	11	18	25	30	34	42	47	51	56	61	66	69
200					7	11	20	24	26	34	40	45	49	52	58	62
220					3	7	14	19	23	30	34	39	43	46	50	55
240						5	11	16	21	25	30	33	37	39	44	49
260						3	8	12	18	21	24	28	32	34	41	43
280							5	7	12	15	20	23	30	32	35	36
300								4	10	14	18	20	24	23	27	26
320									7	7	12	14	14	13	12	12


Flow max	Head max	DC voltages range	AC voltages range	Motor frequency
115L/min	340m	90-380Vmp (90-440VOC)		
PV	Connection	Max input power	Outlet size	Motor size
300W*2*8	2 Way parallel	5.1kW	1.25"	4"
Volume	Gross weight	Net weight	Pump Length	Pump diameter
1. 3m*0.16m*0.20m 0. 42m*0.3m*0.25m	33KGS	27KGS	1.2m	4"



SKP-5SP3-33 MOTOR 5 HP Centrifugal Pump

5HP WIRING

Panel
(2 way parallel connection
60-380Vmp/440VOC)

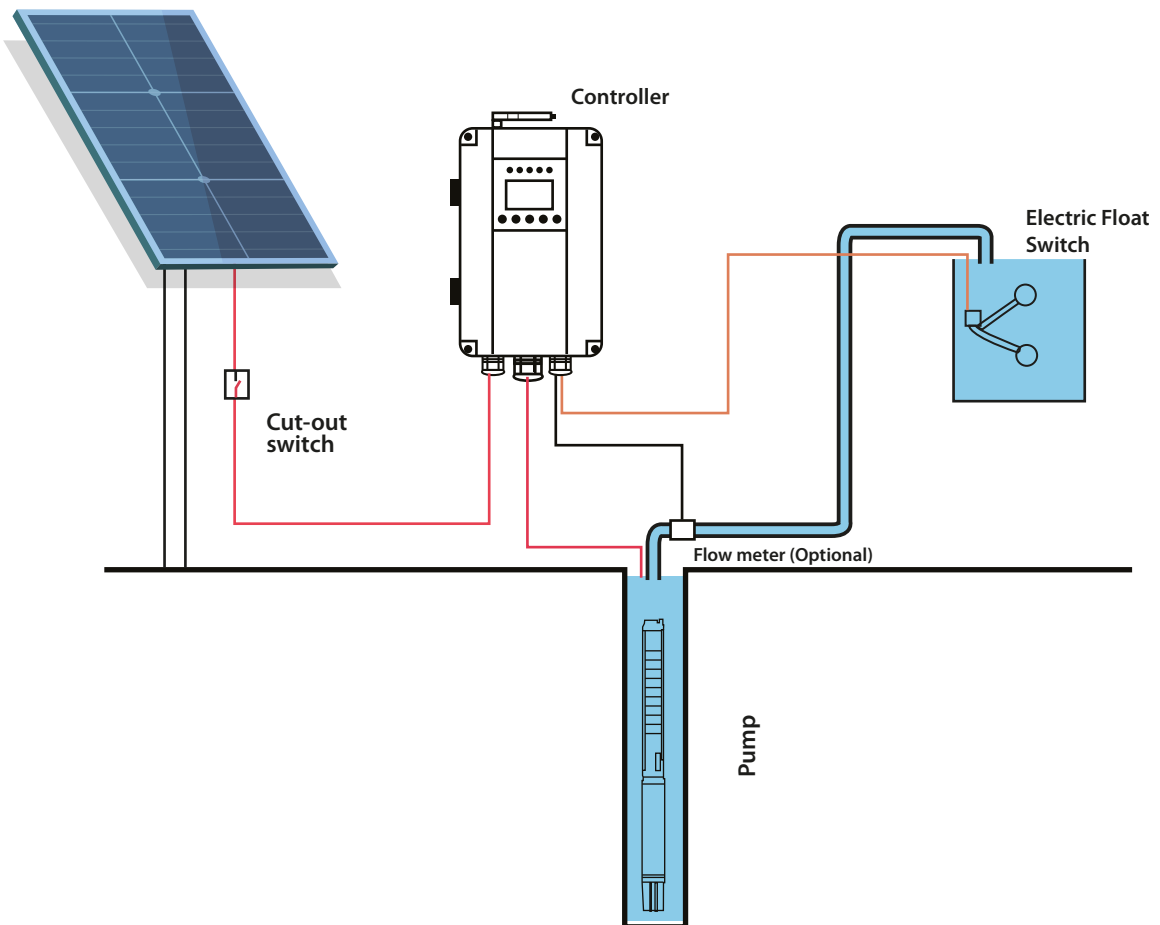

Visit Our Website
www.maxima.solar



Call Us
+971 4 2231185



Our Address
Shop 5&6, 7 States building Baniyas
Square, Deira, Dubai, UAE