

HIOKI


Maxima.SOLAR

INSULATION TESTER Series



INSULATION TESTERS

DROP PROOF



Built tough to withstand a 1-meter drop onto a concrete floor



5 ranges

Rated output voltage (DC)
Effective maximum indicated value

50 V / 100 MΩ

125 V / 250 MΩ

250 V / 500 MΩ

500 V / 2000 MΩ

1000 V / 4000 MΩ

Manage measurement data using Bluetooth® communication (IR4057-50 with Z3210 Only)



WIRELESS ADAPTER Z3210 (Option)
Attach to enable Bluetooth® wireless technology




Learn More

■ Transport to the Excel® file



Open an Excel® file and select a cell. The measured value being held on the instrument's display will be transferred to the computer and entered into the selected cell.


■ Transport to GENNECT Cross




GENNECT Cross, a free app designed specifically for use with Hioki measuring instruments, lets you check and manage measurement results and create reports. The software provides a range of functionality that helps manage data in the field, including photographing measurement sites, placing measurement results on photographs, and saving handwritten memos.



Learn More

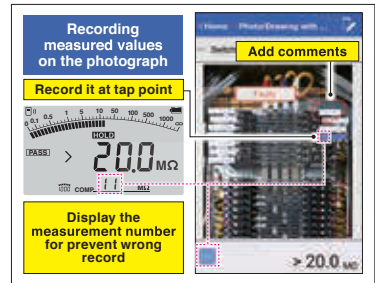

Significantly improve testing speed using test lead with remote switch

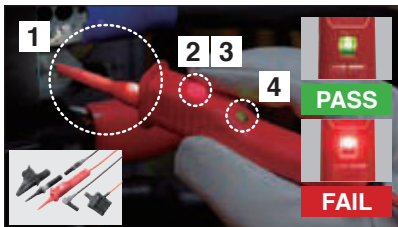

- 1 LED light shines a spotlight on the target
- 2 Red light warns of live voltage detection
- 3 Measurement start switch
- 4 Identify pass/fail decisions with red or green light

TEST LEAD SET WITH REMOTE SWITCH L9788-11 (Option)
*Standard with the IR4056-21, Not CE Marked

Identify PASS / FAIL using light and sound



Compare measured values to pre-set reference values to generate a pass or fail decision with the Comparator function.

Convenient for inspections

■ **Low resistance measurement^{*1}**

Perform EV and HEV continuity checks as well as resistance measurement of protective conductors in facility electrical equipment as defined by IEC 60364.

■ **AC/DC voltage measurement**

Automatically detect AC or DC for testing. Use as a tester thanks to DC voltage measurement functionality.

■ **PV Ω dedicated function^{*2}**

Measurement is not affected even when the PV system is online.

^{*1} Excludes IR4053 ^{*2} IR4053 Only

One-touch Start and Stop

Single test



Measurement voltage is applied while MEASURE key is pressed

Continuous test



Lift and lock the MEASURE key to apply a continuous stream of voltage

Prevent Accidental High Voltage Generation

Flashing light







Under [500V], [1000V], or [PVΩ] settings, the RELEASE button will blink. Press to unlock the release of high voltages as an extra safety measure.

Release lock



Lineup - Digital

Measurement type	Standard	High-speed	PV	High-voltage
Model	IR4056-20 IR4056-21	IR4057-50	IR4053-10	IR3455
Appearance				
Number of ranges	5	5	5	5
Testing voltage (DC) / Effective maximum indicated value		50 V /100 M Ω 125 V /250 M Ω 250 V /500 M Ω 500 V /2000 M Ω 1000 V /4000 M Ω		250 V /500 G Ω 500 V /1.00 T Ω 1000 V /2.00 T Ω 2500 V /5.00 T Ω 5000 V /10.0 T Ω
1st effective measuring range		0.200 to 10.00 M Ω (50 V) 0.200 to 25.0 M Ω (125 V) 0.200 to 50.0 M Ω (250 V) 0.200 to 500 M Ω (500 V) 0.200 to 1000 M Ω (1000 V)		0.00 to 500 G Ω (250 V) 0.00 to 1.00 T Ω (500 V) 0.00 to 2.00 T Ω (1000 V) 0.00 to 5.00 T Ω (2500 V) 0.00 to 10.0 T Ω (5000 V)
PV Ω measurement	N / A	N / A	✓	N / A
Leakage current	N / A	N / A	N / A	1.00 nA to 1.20 mA
DC voltage	600 V	600 V	1000 V	1.00 kV
AC voltage	600 V	600 V	600 V	750 V
Low resistance measurement	✓	✓	N / A	N / A
Displaying 1-min. values	N / A	✓	N / A	N / A
Comparator decision response time	✓ 0.8 second	✓ 0.3 second	✓ 0.8 second (PV : 4 s)	N / A
AUTO power save	✓	✓	✓	✓
AUTO range	✓	✓	✓	✓
Data hold	MANUAL	MANUAL	MANUAL	MANUAL
Bluetooth® communication	N / A	✓ (With Z3210)	N / A	N / A
Bar graph	N / A	✓	N / A	✓
Backlight	✓	✓	✓	✓
Safety standard category	CAT III 600 V	CAT III 600 V	CAT III 600 V	CAT IV 600 V CAT III 1000 V
CE	✓	✓	✓	✓
Dustproof and waterproof	IP40	IP40	IP40	IP40
Drop proof	✓	✓	✓	N / A
Power supply	LR03 \times 4 alkaline	LR03 \times 4 alkaline	LR03 \times 4 alkaline	LR03 \times 6 alkaline
Dimensions (W \times H \times D)	159 \times 177 \times 53 mm 6.26 \times 6.97 \times 2.09 in	159 \times 177 \times 53 mm 6.26 \times 6.97 \times 2.09 in	159 \times 177 \times 53 mm 6.26 \times 6.97 \times 2.09 in	260 \times 250.6 \times 119.5 mm 10.24 \times 9.87 \times 4.70 in
Weight	600 g (21.2 oz)	640 g (22.6 oz)	600 g (21.2 oz)	2.8 kg (98.8 oz)



CE * IR4056-20 only
Product warranty for 3 years
Accuracy guaranteed for 1 year

INSULATION TESTER IR4056-20, IR4056-21



- With
- TEST LEAD L9787
 - Neck strap
 - LR6 alkaline battery x4
 - Instruction manual

IR4056-20



- With
- TEST LEAD SET WITH REMOTE SWITCH L9788-11
 - Neck strap
 - LR6 alkaline battery x4
 - Instruction manual

IR4056-21 **Not CE marked**




5 ranges
Comparator decision response time : 0.8 s
CAT III 600 V

INSULATION TESTER IR4057-50

CE
Product warranty for 3 years
Accuracy guaranteed for 1 year



New



L4930



L4938



L4935

- With
- CONNECTION CABLE L4930
 - ALLIGATOR CLIP SET L4935
 - TEST PIN SET L4938
 - Neck strap
 - LR6 alkaline battery x4
 - Instruction manual

IR4057-50



WIRELESS ADAPTER Z3210 (Option)

Attach to enable Bluetooth wireless technology

With Z3210

Bluetooth

Please see www.hioki.com for list of supported regions.

GENNECT Cross



5 ranges
Comparator decision response time : 0.3 s
Digital bar graph
CAT III 600 V

INSULATION TESTER (For Photovoltaic Generation Systems) IR4053-10

CE
Product warranty for 3 years
Accuracy guaranteed for 1 year



- With
- TEST LEAD L9787
 - Neck strap
 - LR6 alkaline battery x4
 - Instruction manual

IR4053-10



5 ranges
Comparator decision response time : 0.8 s
Comparator decision response time (PV) : 4 s
CAT III 600 V

Model	IR4056, 57-50	IR4053	Testing voltage (DC)					Basic accuracy	
			50 V	125 V	250 V	500 V	1000 V		
Measurement parameters	✓	✓	Testing voltage (DC)					-	
			Effective maximum indicated value (MΩ)	100	250	500	2000	4000	-
			1st effective measuring range (MΩ)	0.200 to 10.00	0.200 to 25.0	0.200 to 50.0	0.200 to 500	0.200 to 1000	±2% rdg ±2 dgt
			2nd effective measuring range (MΩ)	10.1 to 100.0	25.1 to 250	50.1 to 500	501 to 2000	1010 to 4000	±5% rdg
PV Ω measurement	N / A	✓	Testing voltage (DC)					-	
			Effective maximum indicated value (MΩ)	500 V		1000 V		-	
			1st effective measuring range (MΩ)	0.200 to 500		0.200 to 1000		±4% rdg	
			2nd effective measuring range (MΩ)	501 to 2000		1010 to 4000		±8% rdg	
DC Voltage	N / A	✓	4.200 V/42.00 V/420.0 V/1000 V					±1.3% rdg ±4 dgt ¹	
			4.200 V/42.00 V/420.0 V/600 V					±1.3% rdg ±4 dgt ¹	
AC Voltage	✓	✓	420.0 V ² /600 V					±2.3% rdg ±8 dgt ¹	
Low resistance measurement	✓	N / A	10.00 Ω/100.0 Ω/1000 Ω					±3% rdg ±2 dgt	

Operating temperature	IR4056, 57-50: -25°C to 65°C, 90% RH or less (non-condensating) IR4053: 0°C to 50°C, 90% RH or less (non-condensating)
Storage temperature	IR4056, 57-50: -25°C to 65°C, 90% RH or less (non-condensating) IR4053: -10 °C to 50°C, 90% RH or less (non-condensating)
Dustproof and waterproof	IP40
Standards	EN61326 (EMC)
	EN61557-1/-2/-4 ³ /10
Power supply	LR6 alkaline battery x4
Continuous operating time	20 hours
Dimensions (W x H x D)	159 x 177 x 53 mm (6.26 x 6.97 x 2.09 inch)
Weight	IR4056, 53: 600 g (21.2 oz) IR4057-50: 640 g (22.6 oz)

Order code **IR4056-20**

Order code **IR4056-21**

Order code **IR4057-50**

Order code **IR4057-90**

Order code **IR4053-10**

Order code **Z3210**

¹ Ranges in excess of 600 V/1000 V are outside the accuracy guarantee

² Minimum indicated value: 30.0 V

³ Subclause 4.3 of Part 4 (interchanging of test leads) is not applicable when L9788-10 is used

Model IR4057-90 includes Z3210 as a set



Visit Our Website
www.maxima.solar



Call Us
+971 4 552 4462



Our Address
Shop No. 19, SUQ Al Kabeer Building,
Bur Dubai, Dubai, UAE

HIGH VOLTAGE INSULATION TESTER IR3455


Product warranty for 3 years
Accuracy guaranteed for 1 year



5 ranges
Bar graph
CAT IV 600 V, CAT III 1000 V

Order code **IR3455**

Accessories



- TEST LEAD 9750 -01 (Red), -02 (Black), -03 (Blue) (3m) (x1 ea.)
- ALLIGATOR CLIP 9751 -01 (Red), -02 (Black), -03 (Blue) (x1 ea.)
- Instruction manual
- LR6 alkaline battery x6
- USB cable
- CD-R (Data Analysis Software)

9750, 9751


*1 Up to [Test voltage (setting value)/Resistance measurable at 100 nA]
*2 When the USB terminal is covered with the shutter *3 Options



Measurement parameters	Testing voltage (DC)	250 V	0.00 MΩ to 500 GΩ
	: measuring range	500 V	0.00 MΩ to 1.00 TΩ
		1 kV	0.00 MΩ to 2.00 TΩ
		2.5 kV	0.00 MΩ to 5.00 TΩ
		5 kV	0.00 MΩ to 10.0 TΩ
Insulation resistance	Measurement current	1 mA (Test voltage 250 V to 1.00 kV) 0.5 mA (Test voltage 1.10 kV to 2.50 kV) 0.25 mA (Test voltage 2.60 kV to 5.00 kV)	
	Short-circuit current	2 mA or less	
Leakage current	Accuracy	±5% rdg ±5 dgt. ¹	
	DC Voltage	±50 V to ±1.00 kV Basic accuracy: ±5% rdg ±5 dgt	
AC Voltage	AC Voltage	50 V to 750 V Basic accuracy: ±5% rdg ±5 dgt	
	Temperature	-10.0°C to 70.0°C Basic accuracy: ±1.0°C	
Other	Operating temperature	-10°C to 40°C, 80% RH or less (non-condensating)	
	Storage temperature	-10°C to 50°C, 90% RH or less (non-condensating)	
	Dustproof and waterproof	IP40 (EN60529) ²	
	Standards	EN61010 (safety) , EN61326 (EMC)	
	Power supply	LR6 (AA) alkaline battery x6: 5 hours BATTERY PACK 9459 ³ : 9 hours AC ADAPTER 9418-15 ³	
Dimensions (W x H x D)	260 x 250.6 x 119.5 mm (10.24 x 9.87 x 4.70 in)		
Weight	2.8 kg (98.8 oz)		

Function introduction HIGH VOLTAGE INSULATION TESTER IR3455


STEP 5.0 kV step voltage test

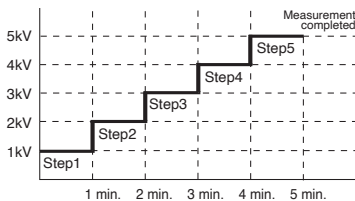


Voltage application time for each step: 30 s/1/2/5 m.

In this type of test, the voltage is gradually raised and the insulation resistance and leakage current change is measured. Two different step settings are available: 500 V 1 kV 1.5 kV 2 kV 2.5 kV and 1 kV 2 kV 3 kV 4 kV 5 kV.

PI: Polarization Index DAR: Dielectric Absorption Ratio



PI value display



DAR value display

The PI and DAR values which are used as an evaluation standard for insulation are automatically calculated.

Data Memory Function



The IR3455 provides a manual storage function for 100 data and a logging function for 10 data (360 times). Date and time are also stored, reducing the need for handwritten notes. Install the included software on your computer and connect via USB to transfer the data stored in the internal memory of the IR3455 to your computer.

Function introduction INSULATION TESTER (For Photovoltaic Generation Systems) IR4053-10

Measurement not affected by generating PV



The IR4053, which was designed for PV, can accurately measure insulation resistance without being affected by the generating PV.

Accurate and safe measurement without creating shorts



Normally, to accurately measure the insulation resistance of a generating PV, one needs to short the measured circuit. That's not necessary with the IR4053.



Built-in PV dedicated function

Analog Meters



DROP PROOF



Built tough to withstand a 1-meter drop onto a concrete floor

Single range
IR4016-20
IR4017-20
IR4018-20


3 range
3490

See better in the dark



Bright LED

Significantly improve testing speed using test lead with remote switch



L9788-11 (Option)

- Start and stop the test at the touch of a button
- Illuminate the test location with a bright white LED
- Work safely knowing that when the RED is lit, live wires, high voltage or electrical discharge is present

Check for Live Circuits



The LIVE CIRCUIT LED will light up in red whenever the voltage exceeds 20 V AC between the LINE and EARTH terminals, and when at least 20 V DC is still remaining during the auto discharge.

One-touch Start and Stop



Measurement voltage is applied while MEASURE key is pressed




Lift and lock the MEASURE key to apply a continuous stream of voltage

Flip the Cover



Quick and easy storage without disconnecting the leads

Check the Battery Status



Lineup - Analog Meters

Measurement parameters	1 Range IR4016 -20 	Testing voltage (DC)	500 V		
		Effective maximum indicated value	100 MΩ		
		1st effective measuring range	0.1 MΩ to 50 MΩ		
		2nd effective measuring range	0.01 MΩ to 0.1 MΩ or less 50 MΩ or more to 100 MΩ		
	1 Range IR4017 -20 	Testing voltage (DC)	500 V		
		Effective maximum indicated value	1000 MΩ		
		1st effective measuring range	1 MΩ to 500 MΩ		
		2st effective measuring range	0.5 MΩ to 1 MΩ or less 500 MΩ or more to 1000 MΩ		
	1 Range IR4018 -20 	Testing voltage (DC)	1000 V		
		Effective maximum indicated value	2000 MΩ		
		1st effective measuring range	2 MΩ to 1000 MΩ		
		2nd effective measuring range	1 MΩ to 2 MΩ or less 1000 MΩ or more to 2000 MΩ		
3 Ranges 3490 	Testing voltage (DC)	250 V	500 V	1000 V	
	Effective maximum indicated value	100 MΩ		4000 MΩ	
	1st effective measuring range	0.05 MΩ to 50 MΩ		2 MΩ to 1000 MΩ	
	2nd effective measuring range	0.01 MΩ to 0.05 MΩ or less 50 MΩ to 100 MΩ		0.5 MΩ to 2 MΩ 1000 MΩ to 4000 MΩ	
Accuracy (Insulation)		±2% of scale length (1st effective measuring range) ±2% of scale length (2nd effective measuring range)			
AC Voltage		0 to 600 V			

Other	Operating temperature	0°C to 40°C, 90% RH or less (non-condensating)
	Storage temperature	-10°C to 50°C, 90% RH or less (non-condensating)
	Dustproof and waterproof	IP40
	Drop proof	YES
	Backlight	YES
	Safety standard category	CAT III 600 V
	Standards	EN61010 (Safety), EN61326 (EMC)
	Power supply Continuous operating time	LR6 alkaline battery x4 20 hours
	Dimensions(W × H × D)	IR4016, IR4017, IR4018: 162 × 182 × 57 mm (6.38 × 7.17 × 2.24 in) 3490: 162 × 167 × 52 mm (6.38 × 6.57 × 2.05 in)
	Weight	IR4016, IR4017, IR4018: 820 g (28.9 oz), 3490: 840 g (29.6 oz)

Accessories



L9787

- TEST LEAD L9787 (1.2 m)
- Neck strap
- LR6 alkaline battery x4
- Instruction manual

Order code	IR4016-20
Order code	IR4017-20
Order code	IR4018-20
Order code	3490



Visit Our Website
www.maxima.solar




Call Us
+971 4 552 4462




Our Address
**Shop No. 19, SUQ Al Kabeer Building,
Bur Dubai, Dubai, UAE**

Options

IR401X, IR405X, 3490	
1	TEST LEAD SET WITH REMOTE SWITCH L9788-11
2	TEST LEAD WITH REMOTE SWITCH (RED) L9788-10
3	TIP PIN L9788-90
4	BREAKER PIN L9788-92
5	MAGNETIC ADAPTER 9804-01
6	MAGNETIC ADAPTER 9804-02
7	TEST LEAD L9787
8	CONNECTION CABLE SET L4930
9	ALLIGATOR CLIP SET L4935
10	TEST PIN SET L4938
11	BREAKER PIN L9787-91
12	WIRELESS ADAPTER Z3210

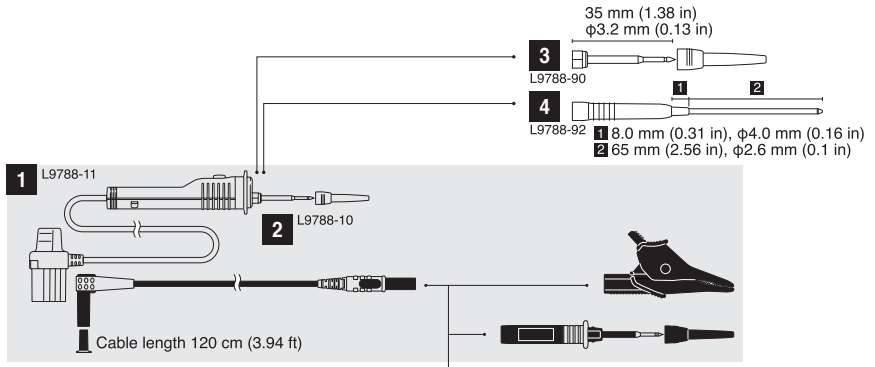

* When measuring in a CAT III environment, be sure to attach the sleeve to the test leads.

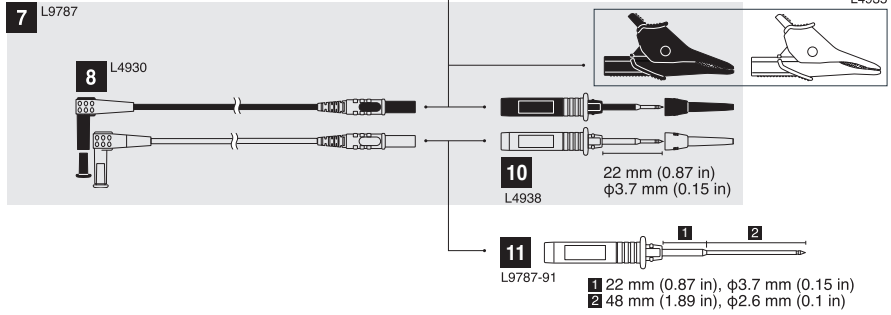

IR3455		
1	TEST LEAD 9750 -01	RED, 3 m (9.84 ft)
2	TEST LEAD 9750 -02	BLACK, 3 m (9.84 ft)
3	TEST LEAD 9750 -03	BLUE, 3 m (9.84 ft)
4	TEST LEAD 9750 -11	RED, 10 m (32.81 ft)
5	TEST LEAD 9750 -12	BLACK, 10 m (32.81 ft)
6	TEST LEAD 9750 -13	BLUE, 10 m (32.81 ft)
7	ALLIGATOR CLIP 9751 -01	RED
8	ALLIGATOR CLIP 9751 -02	BLACK
9	ALLIGATOR CLIP 9751 -03	BLUE
10	TEMPERATURE SENSOR 9631-01	Molded plastic thermistor type (1 m (3.28 ft))
11	TEMPERATURE SENSOR 9631-05	Molded plastic thermistor type (5 cm (0.16 ft))
12	AC ADAPTER 9418-15	
13	BATTERY PACK 9459	

