



Nominal Flow	2.8 m ³ /hr @ 40 m
Flow Range	1.80 ~ 2.76 m ³ /hr
Head Range	20 ~ 140 m

Solar pumping System

Note:

Solar motor powers the new system for the supply of clean water based on the most widely available renewable energy, the sun. It is designed for easy use and requires no maintenance. It is the ideal solution for supplying water in remote areas, where the normal power supply of electricity from the power grid is inconsistent or completely unavailable


Parameter

Location:	United Arab Emirates;Du bai	Water Temp:	25°C		
Required daily output:	10m ³ /day	Dirt loss:	3%	Motor lenght:	50
Pipe type:	Plastic	Static Head:	100m	Pipe length:	20m

Products


Submersible pump	1pc;4SPF2.8-140 (1.5HP)
Solar panel	5pc;1500Wp;300w ×5pcs
Motor cable	50m*2.5mm ²
Pipeline	20m;Pipeline
Accessories	

Daily output in average month (14.1) m³/day

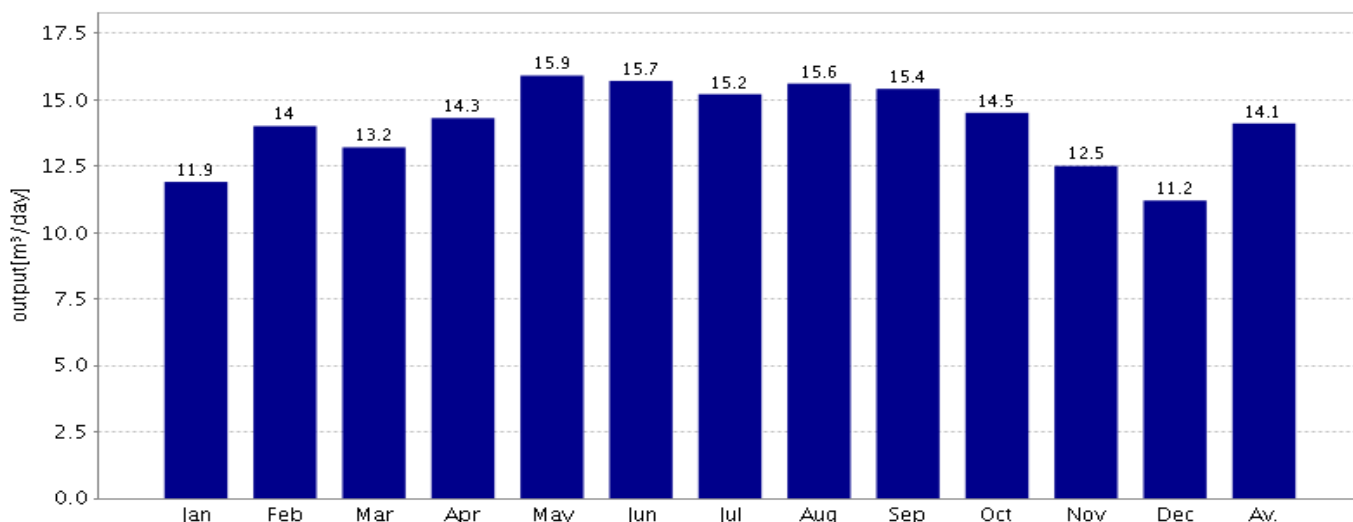


Energy[kWh]	7.40	8.76	8.24	8.94	9.91	9.79	9.49	9.72	9.60	9.03	7.82	6.99	8.80
Irradiation[kWh/m ²]	5.48	6.49	6.10	6.62	7.34	7.25	7.03	7.20	7.11	6.69	5.79	5.18	6.52

Solar Panel Wiring

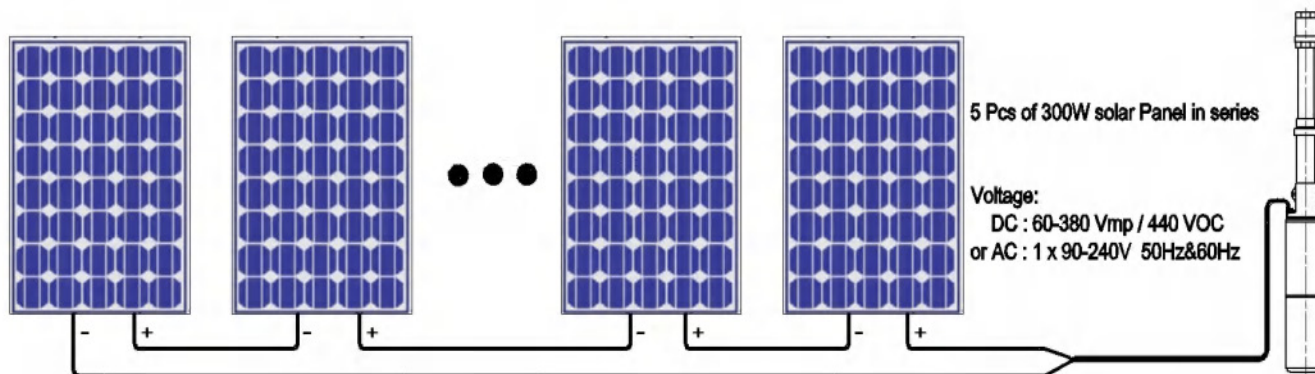


Sizing Layout

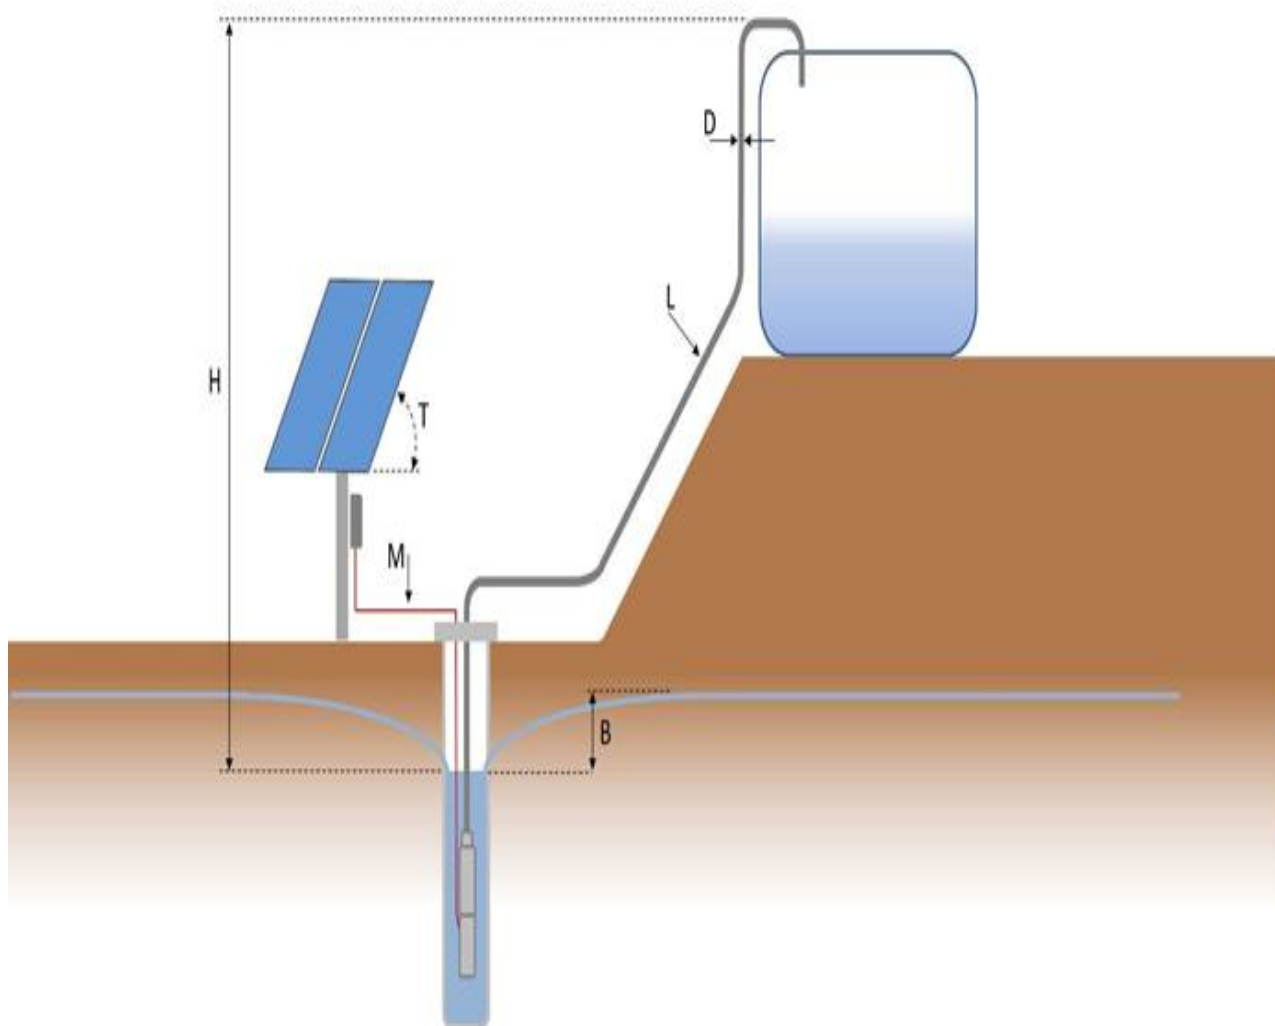

H (Static head):	Vertical height from the dynamic water level to the highest point of delivery.
B (Drawdown):	Lowering of water level depending on flow rate and recovery rate of the well.
D (Pipeline inner diameter):	
L (Pipe length):	Entire pipeline from the pump outlet to the point of delivery. Elbows and armatures must be added as an equivalent length of pipeline.
M (Motor cable):	The cable between controller and pump unit.
T (Tilt angle):	Angle of the PV generator surface from the horizontal plane.

System Layout

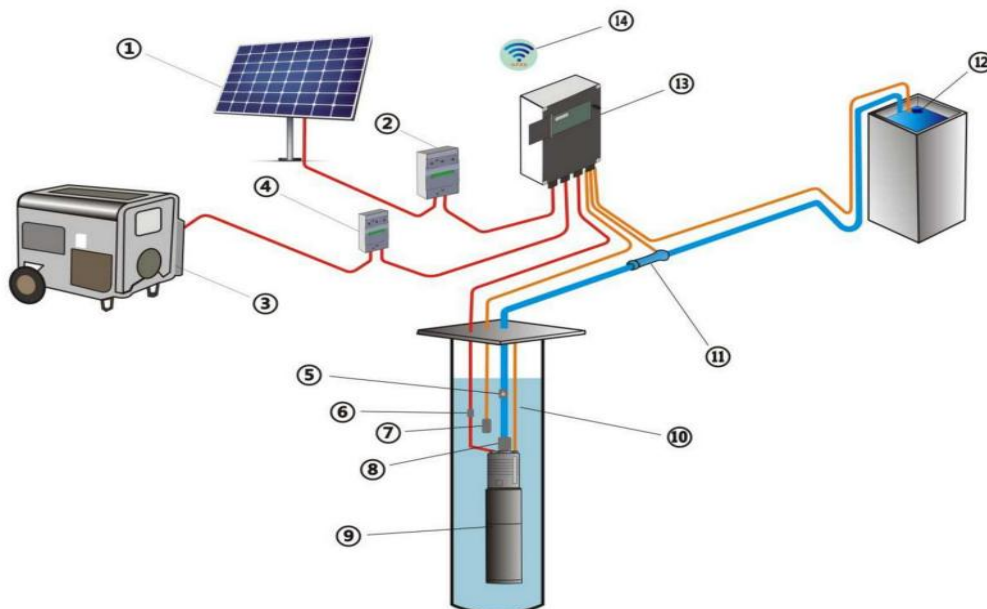

- | | |
|--------------------------------------------------------------------------------------|--------------------------------|
| 1、 Solar panels | 8、 Sacrificial Anode(optional) |
| 2、 SPD(DC) Surge Protection Device(optional) | 9、 Solar water pump |
| 3、 Generator or Grid (optional) | 10、 Traction rope |
| 4、 SPD(AC) Surge Protection Device (optional) | 11、 Flow meter(optional) |
| 5、 Check valve (optional) | 12、 Float Switch(For Tank) |
| 6、 Wiring Package(Epoxy Resin Wiring Package or Heat Shrinkable Tube Wiring Package) | 13、 Monitor(optional) |
| 7、 Float Switch (For Dry Protection, Optional) | 14、 GPRS (optional) |

Note:

- 1、 Please read the manual carefully for all installation accessories, Please contact factory if you need all the above accessories.
- 2、 Float Switch for Dry Protection is Optional, Because the pump system has its own dry protection;
- 3、 Monitor is not a necessary part of pump system .but it provides more functions and protections for pump system. Making the system more convenient and intelligent. For example intelligent switching of AC/DC power supply; Floating ball interface terminal etc.
- 4、 The pump shall be installed at least 1.5m away from the bottom of the well;
- 5、 It is recommended to install a check valve every 70m of the vertical height of the pipeline.



4SPF2.8-140 (1.5HP)

Solar Submersible Pump System

System Overview

Head	max. 140m
Flow	max. 46L/min
Recommend Max input Power	max. 1.5 kW
Minimum well diameter	min 4" inch
Pump discharge	Rp 1"
Efficiency Max	60%

Product advantage

- .Stainless steel: AISI 304 (316 optional)
- .BLDC High Efficiency Motor
- .MPPT Efficiency Max.98%
- .Double shielded water filled motor(No pollution leakage)
- .Soft start running make syetem lifer long
- .Hybrid Powered by AC/DC;50Hz&60Hz both working
- .Wide voltage:1X90-240VAC;60-380Vmp/440VOC
- .Dry protection(No additional float sensor required)
- .Reverse protection(Can connect both wire to + and -)
- .Over-head protection(need monitor and flow meter)
- .2 years warranty

Technical Data

Controller 4SPF2.8-140 (1.5HP)

- .Controller Built-in
- .Losing-Phase protection
- .Over temperature protection
- .Over-load/Over-current/Over-voltage protection

Motor 4SPF-1.5HP AC&DC

Voltage	AC 1×90-240V DC max.VOC 450V DC Vmp 60-380V
Current	max.AC 10A max.DC 12A
Motor Efficiency	max.88%
WaterTemp	max.25°C
Insulation class	F
Enclosure class	X8
Submersion	max.150m
Required cooling flow	0.8L/s
Connect Standard	40
Speed	500-3600

Pump End

- .Stainless steel: AISI 304 (316 optional)
- .Helical pump

Standards




Note:

- *AC/DC switching needs to wait 1 minute
- *Recommended Solar Panels in Series
- *For helical pump. it shall not be used in the environment with poor water quality.long-term use will cause performance degradation or damage
- *VOC (V) Volts open circuit nothing connected;Vmp (V) Volts maximum power point under load;Exceeding limits may cause serious harm or irreparable damage

4SPF2.8-140 (1.5HP)

Solar Pumping project

Pump chart

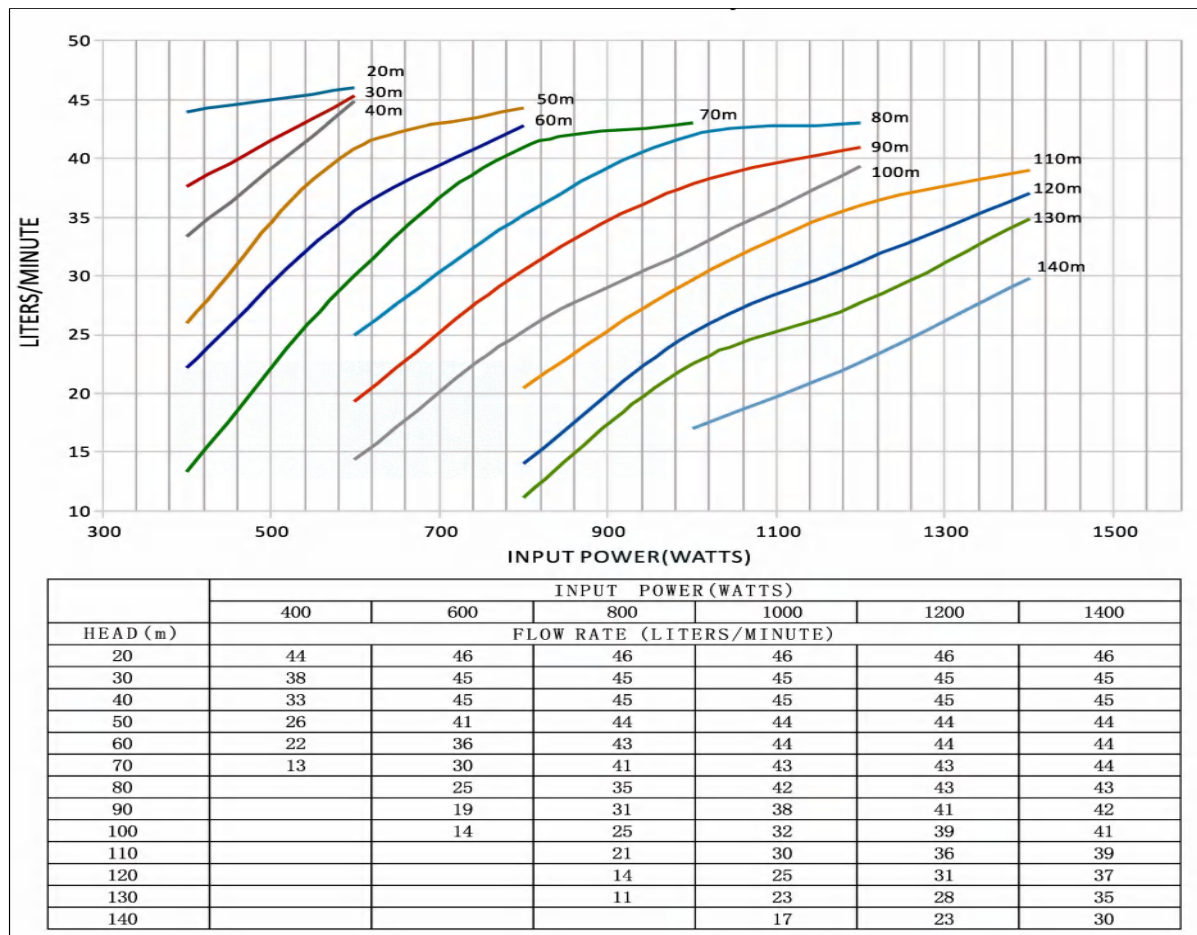

Dimensions and Weights

