

Nominal Flow	5 m ³ /hr @ 80 m
Flow Range	3.36 ~ 8.3 m ³ /hr
Head Range	40 ~ 110 m

Solar pumping System

Note:

Solar motor powers the new system for the supply of clean water based on the most widely available renewable energy, the sun. It is designed for easy use and requires no maintenance. It is the ideal solution for supplying water in remote areas, where the normal power supply of electricity from the power grid is inconsistent or completely unavailable


Parameter

Location:	United Arab Emirates;Du bai	Water Temp:	25°C		
Required daily output:	15m ³ /day	Dirt loss:	3%	Motor lenght:	50
Pipe type:	Plastic	Static Head:	90m	Pipe length:	20m


Products

Submersible pump	1pc;4SPN5-12(2.5HP DC)
Solar panel	9pc;2700Wp;300w ×9pcs
Motor cable	
Pipeline	20m;Pipeline
Accessories	


Daily output in average month (26.4) m³/day

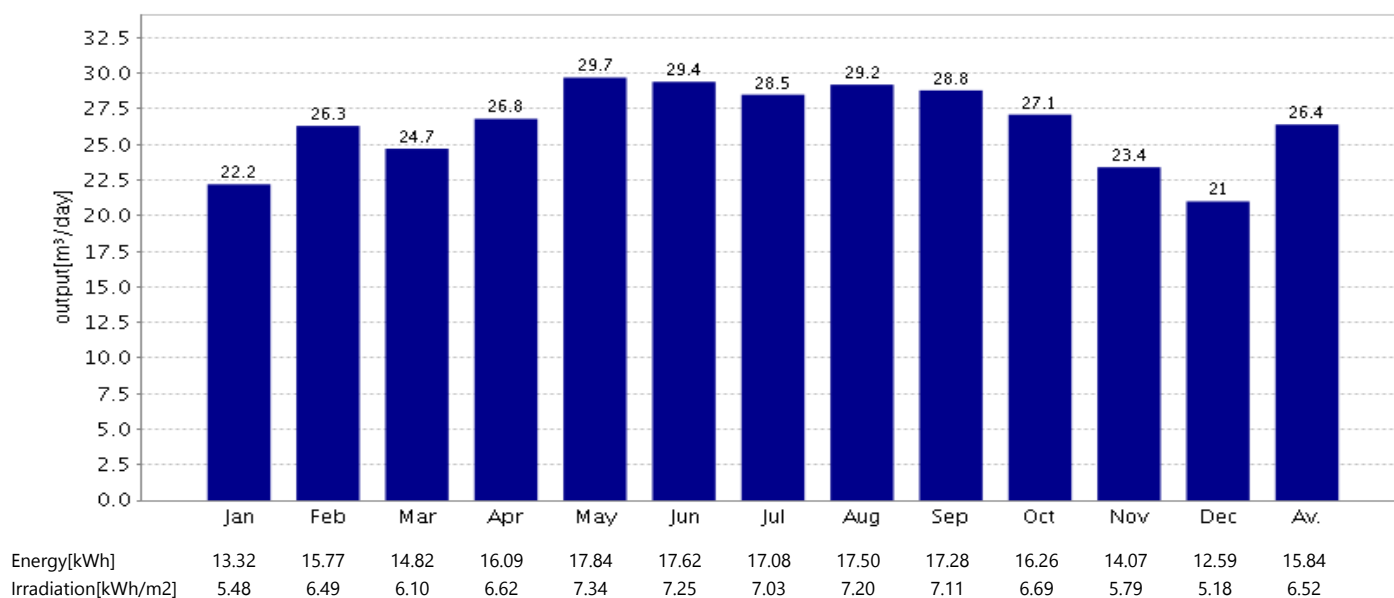

Solar Panel Wiring

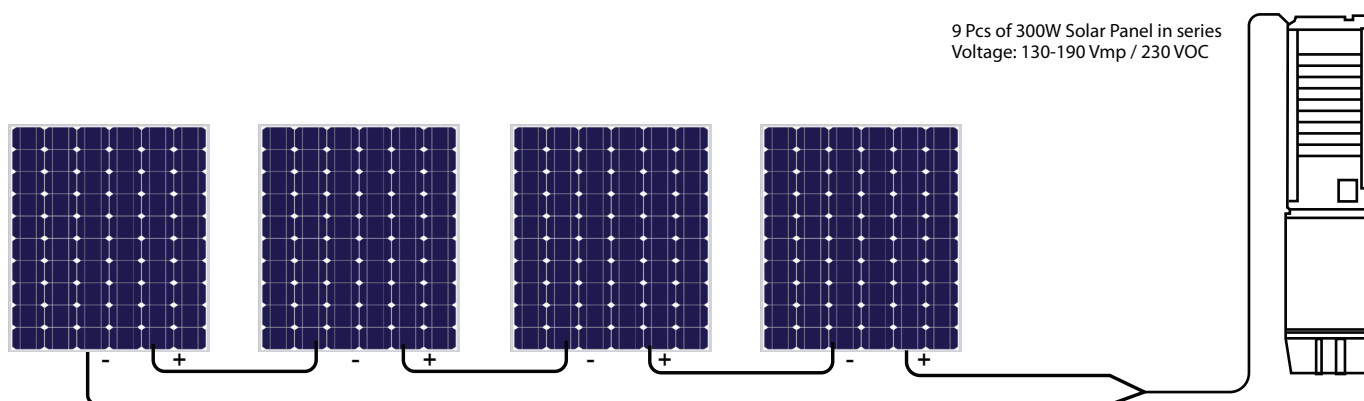

Sizing Layout

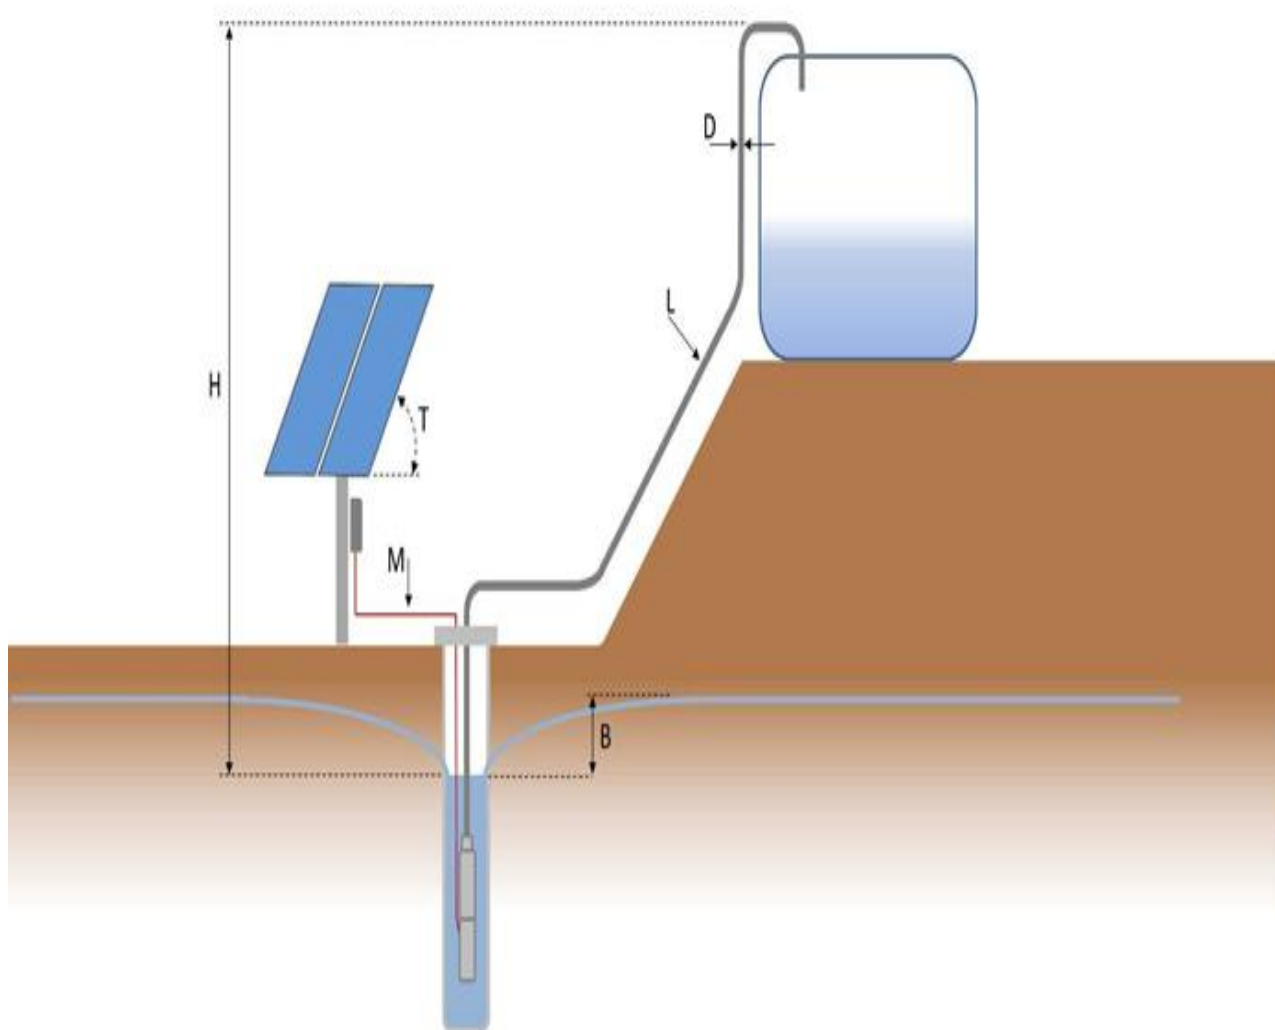

H (Static head):	Vertical height from the dynamic water level to the highest point of delivery.
B (Drawdown):	Lowering of water level depending on flow rate and recovery rate of the well.
D (Pipeline inner diameter):	
L (Pipe length):	Entire pipeline from the pump outlet to the point of delivery. Elbows and armatures must be added as an equivalent length of pipeline.
M (Motor cable):	The cable between controller and pump unit.
T (Tilt angle):	Angle of the PV generator surface from the horizontal plane.



4SPN5-12(2.5HP DC)

Solar Submersible Pump System

System Overview

Head	max. 134m
Flow	max. 172L/min
Recommend Max input Power	max. 2.8 kW
Minimum well diameter	min 4 inch
Pump discharge	Rp 1.5
Efficiency Max	%

Product advantage

- .Motor Stainless steel: AISI 304;
- .BLDC High Efficiency Motor;
- .Built in Controller;
- .Only could powered by DC power;
- .Encapsulated water filled motor(No pollution risk);
- .Soft start running makes system's life longer;
- .Thrust bearing system;
- .Positive and negative pole reverse connection alarm;
- .Over-load/Over-current/Over-voltage/Low-voltage protection;
- .Fault reporting;
- .Dry protection(No additional float sensor required);
- .Accessories such as Heat Shrinkable Tube Wiring Package\ Rope installation etc.

Technical Data

Controller 4SPN5-12(2.5HP DC)

- .Built in Controller;
- .MPPT Efficiency Max.98%;
- .Voltage:60-380Vmp/ 450VOC;
- .Over temperature protection;
- .Losing-Phase protection.

Motor 4SPN-2.5HP DC

Voltage	DC max.VOC 450V DC Vmp 60-380V
Current	max.DC 10A
Motor Efficiency	max.85%
WaterTemp	max.40°C
Insulation class	F
Enclosure class	IP X8
Submersion	max.150m
Required cooling flow	0.8L/s
Speed	500-4000

Pump End

- .Stainless steel: AISI 304;
- .Non-return valve;
- .Centrifugal pump.

Standards



Note:

*Accpet 2-10 PCS 340W panel best 7-10Pcs


**VOC (V) Volts open circuit nothing connected;Vmp (V) Volts maximum power point under load;Exceeding limits may cause serious harm or irreparable damage.



4SPN5-12(2.5HP DC)

Solar Pumping project

Pump chart

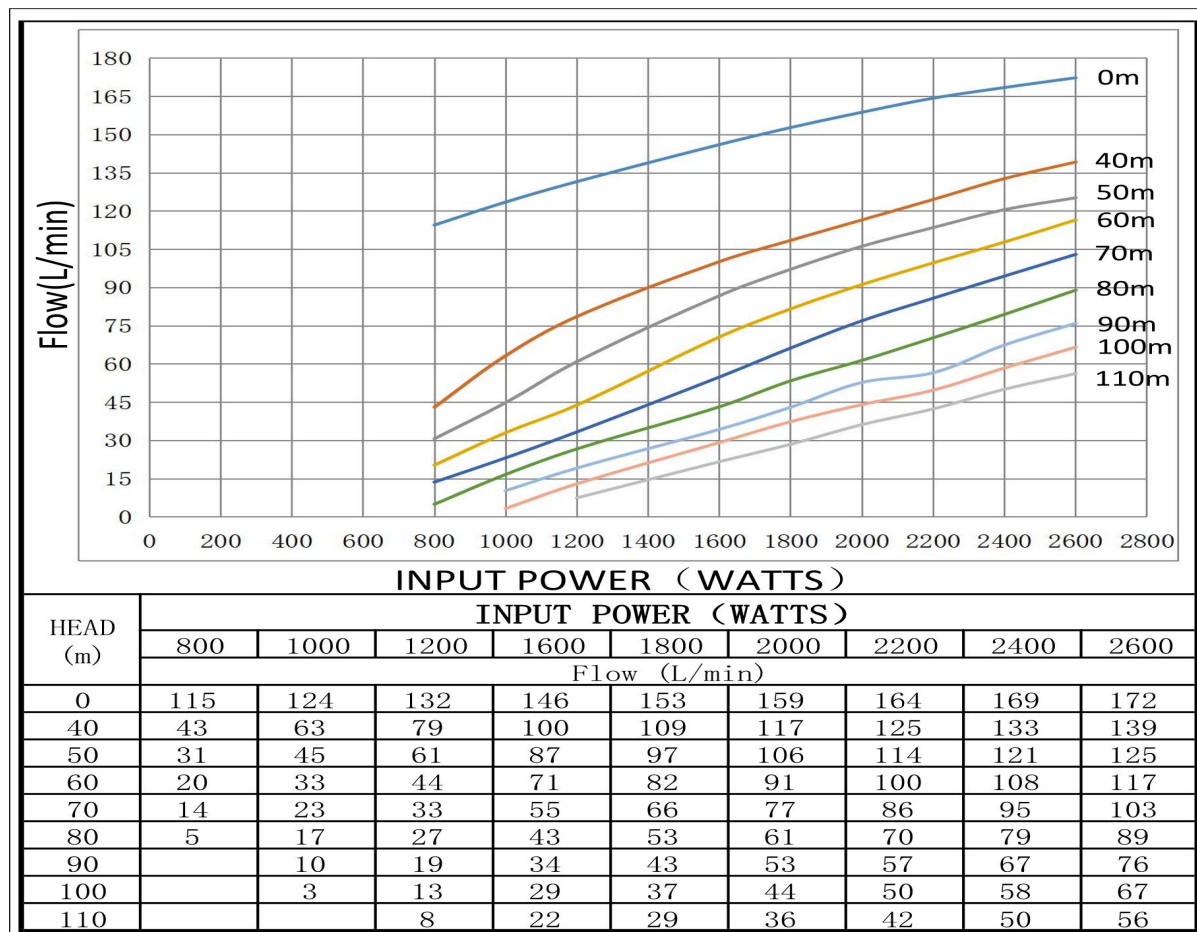

Dimensions and Weights

