

Solar pumping System

Note:

MAXIMA solar motor powers the new system for the supply of clean water based on the most widely available renewable energy, the sun. It is designed for easy use and requires no maintenance. It is the ideal solution for supplying water in remote areas, where the normal power supply of electricity from the power grid is inconsistent or completely unavailable

Nominal Flow	5.6 m ³ /hr @ 60 m
Flow Range	0.9 ~ 8.4 m ³ /hr
Head Range	30 ~ 160 m


Parameter

Location:	UAE	Water Temp:	25°C		
Required daily output:	8m ³ /day	Dirt loss:	3%	Motor lenght:	50
Pipe type:	Plastic	Static Head:	55m	Pipe length:	20m


Products

Submersible pump	1pc;4SPW5-15 (3HP DC)
Solar panel	9pc;2100Wp;300w × 9pcs
Motor cable	
Pipeline	20m;Pipeline
Accessories	


Daily output in average month (38.7) m³/day

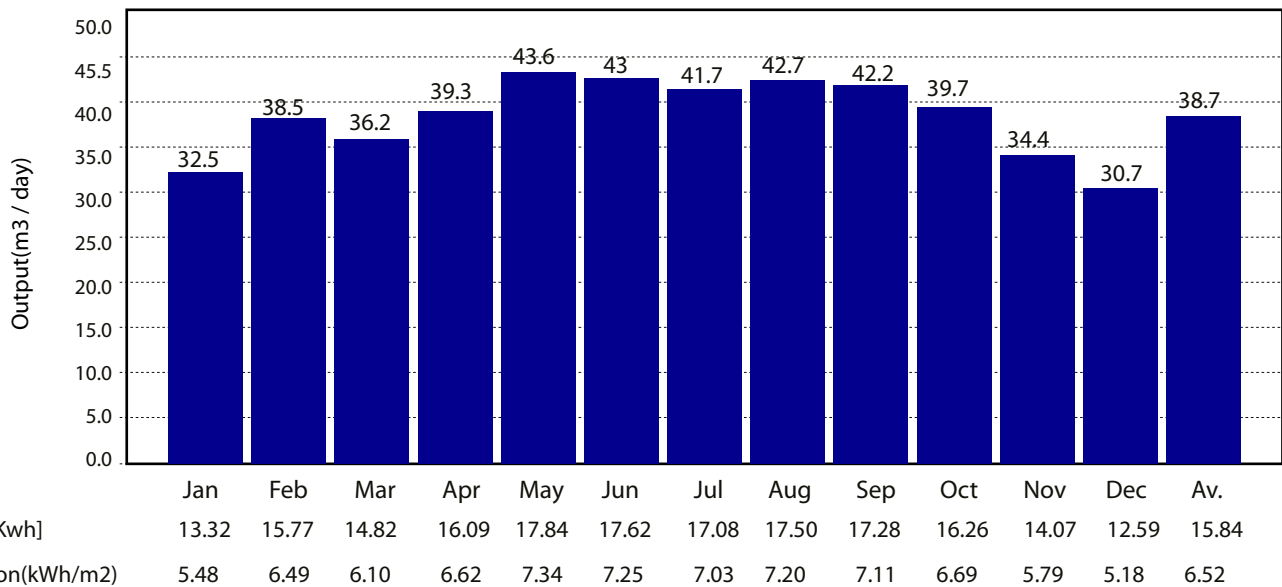

Solar Panel Wiring

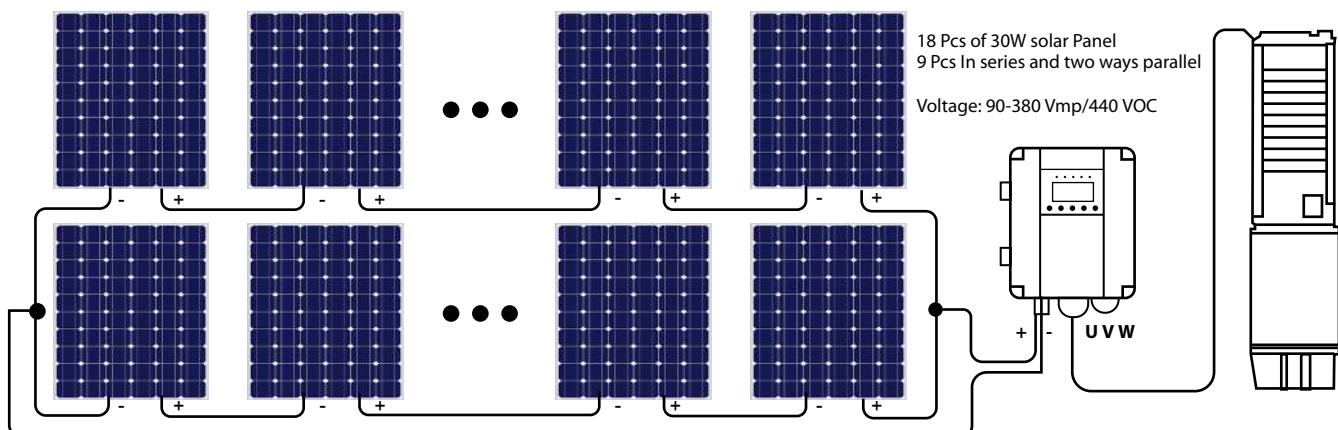


Sizing Layout

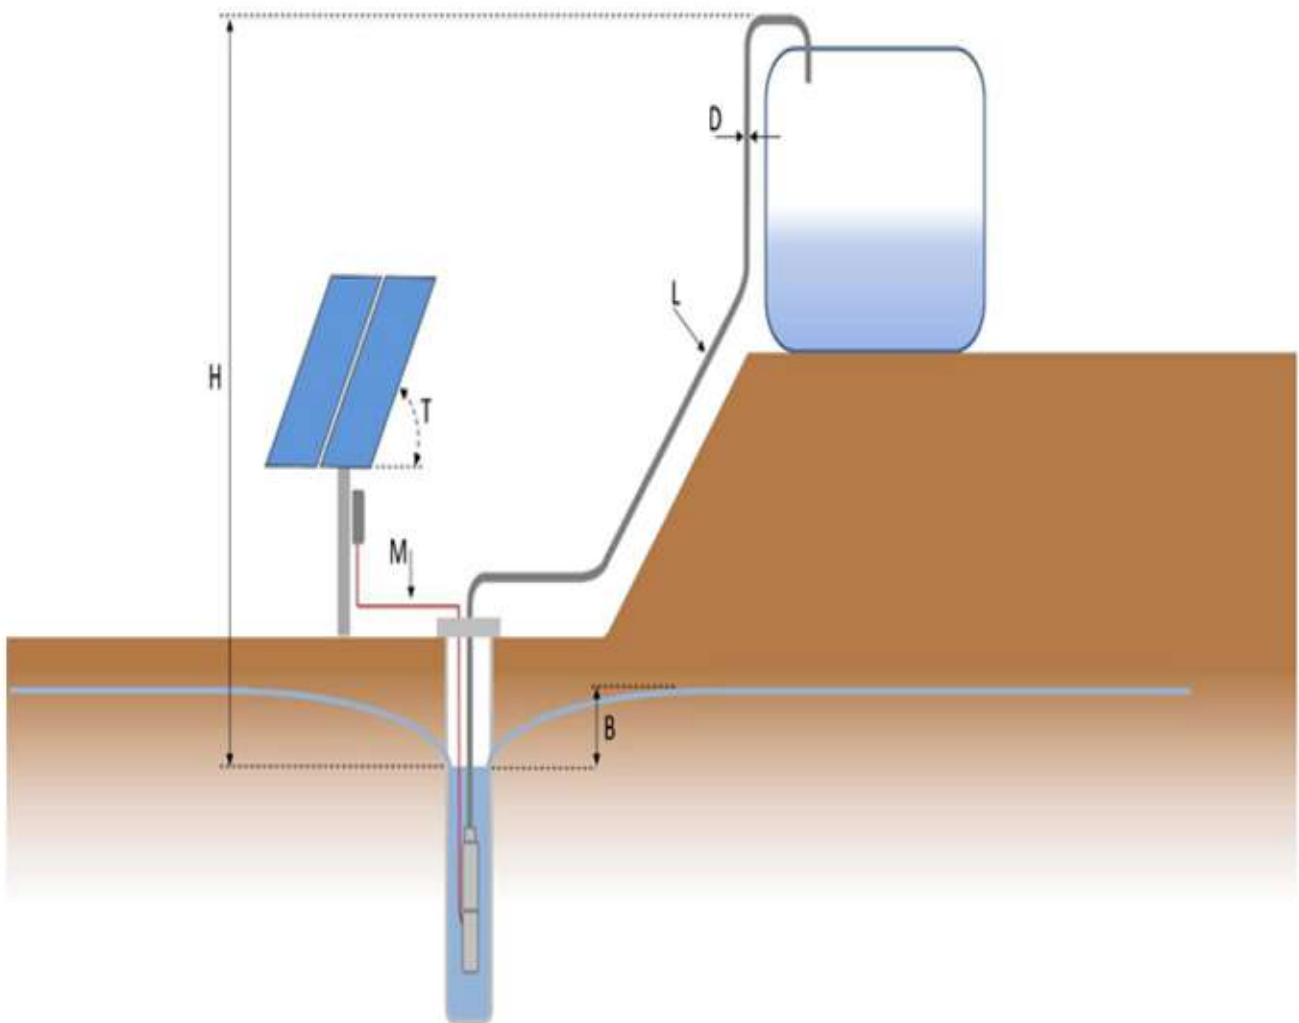

H (Static head):	Vertical height from the dynamic water level to the highest point of delivery..
B (Drawdown):	Lowering of water level depending on flow rate and recovery rate of the well.
D (Pipeline inner diameter):	
L (Pipe length):	Entire pipeline from the pump outlet to the point of delivery. Ellbows and armatures must be added as an equivalent length of pipeline.
M (Motor cable):	The cable between controller and pump unit.
T (Tilt angle):	Angle of the PV generator surface from the horizontal plane.

System Layout

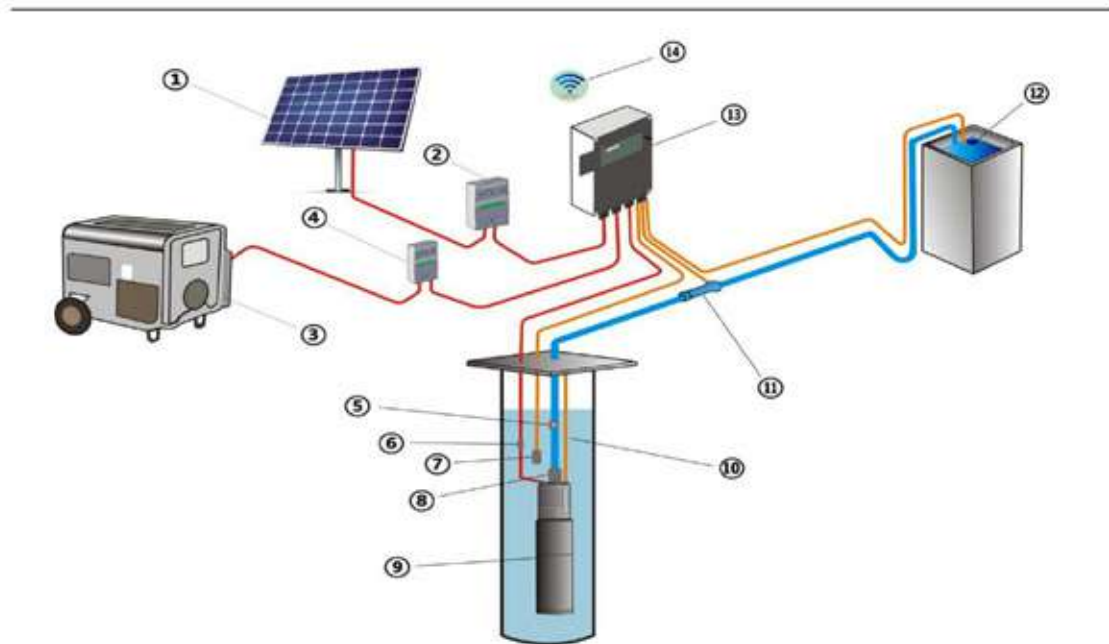

- | | |
|--|--------------------------------|
| 1. Solar panels | 8. Sacrificial Anode(optional) |
| 2. SPD(DC) Surge Protection Device(optional) | 9. Solar water pump |
| 3. Generator or Grid (optional) | 10. Traction rope |
| 4. SPD(AC) Surge Protection Device (optional) | 11. Flow meter(optional) |
| 5. Check valve (optional) | 12. Float Switch (For Tank) |
| 6. Wiring Package(Epoxy Resin Wiring Package or Heat Shrinkable Tube Wiring Package) | 13. Monitor(optional) |
| 7. Float Switch (For Dry Protection, Optional) | 14. GPRS (optional) |

NOTE

1. Please read the manual carefully for all installation accessories, Please contact factory if you need all the above accessories.
2. Float Switch for Dry Protection is Optional, Because the pump system has its own dry protection;
3. Monitor is not a necessary part of pump system .but it provides more functions and protections for pump system. Making the system more convenient and intelligent. For example intelligent switching of AC/DC power supply; Floating ball interface terminal etc.
4. The pump shall be installed at least 1.5m away from the bottom of the well:
5. It is recommended to install a check valve every 70m of the vertical height of the pipeline.

4SPW5-15 (3HP DC)

Solar Submersible Pump System

System Overview

Head	max. 170m
Flow	max 161L/min
Recommend Max Input Power	max. 3 kW
Minimum well diameter	min 4 inch
Pump discharge	Rp 1.5"
Efficiency Max	%

Product advantage

Stainless steel: AISI 304
 BLDC High Efficiency Motor,
 External Controller:
 Only could powered by DC power:
 Voltage/Current/Power/Rpm/Controller temperature Display
 Encapsulated water filled motor (No pollution risk):
 Soft start running makes system's life longer:
 Thrust bearing system
 Reverse protection (reverse + and - is fine):
 Over load protection/over current protection/over power protection:
 Wide voltage: 90-380V mp/440VOC:
 Dry protection(No additional float sensor required):
 Dry protection(No additional float sensor required):
 GPRS(Optional):

Technical Data:

Controller 4SPW5-15 (3HP DC)

Built in controller;
 MPPT Efficiency Max. 98%
 Voltage 90-380Vmp/440VOC
 Enclosure class: IP65
 Error Report
 Lacking-Phase protection
 Over temperature protection;

Motor 4SPW-1.5HP DC

Voltage	DC max. VOC 450V DC Vmp 60-380V
Current	max. DC 10A
Motor Efficiency	max 88%
WaterTemp	max40°C
Insulation class	F
Enclosure class	IP X8
Submersion	max. 150m
Required cooling flow	0.8L/s
Connect Standard	4"NEMA
Speed	500-4000

Pump End

Stainless steel: AISI 304 ;
 Non-return valve:
 Centrifugal pump

Standards




Note:

*Accept 2-10 PCS 340W Panel best 7-10Pcs

*VOC (V) Volts open circuit nothing connected;Vmp (V) Volts maximum power point under load;Exceeding limits may cause serious harm or irreparable damage.



4SPW5-15 (2HP DC) Solar Pumping Project Pump Chart

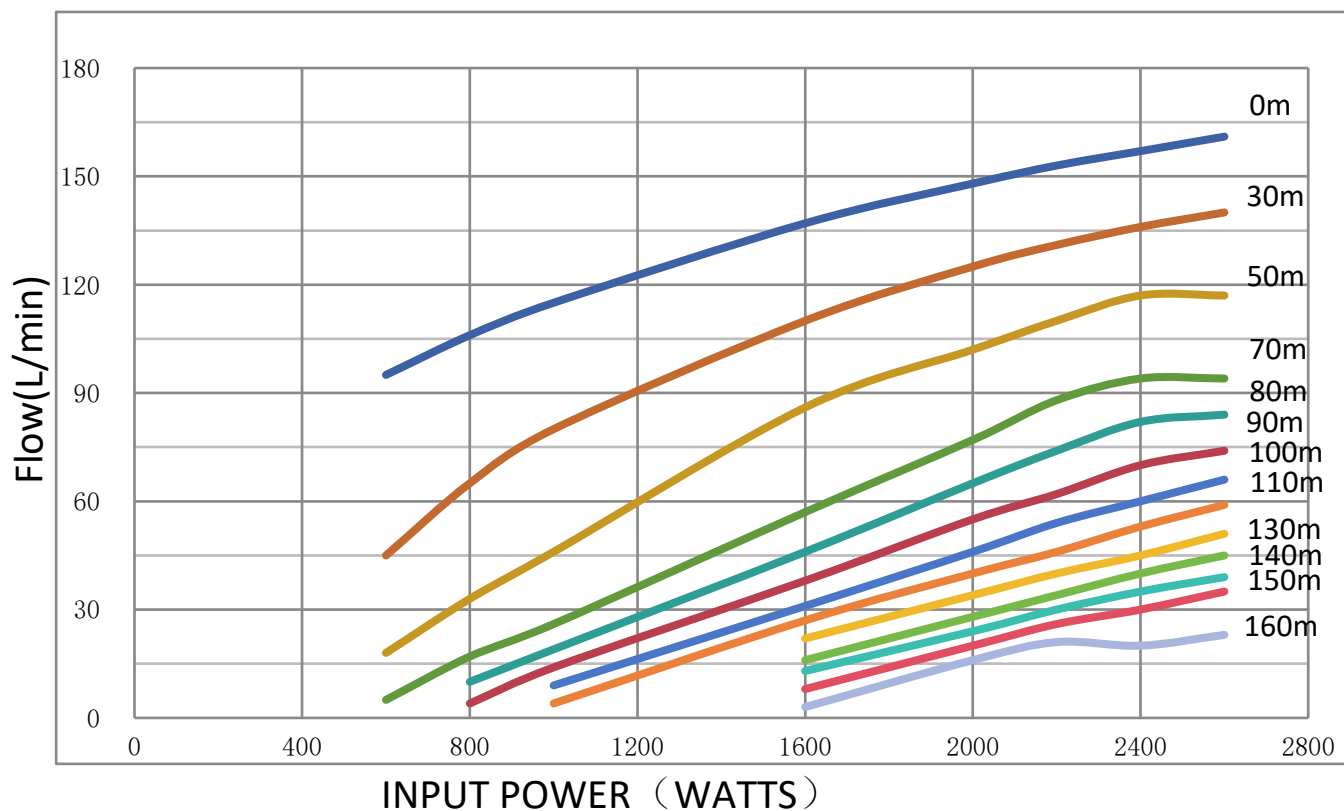

HEAD (m)	INPUT POWER (WATTS)							
	600	800	1000	1600	2000	2200	2400	2600
	Flow (L/min)							
0	95	106	115	137	148	153	157	161
30	45	65	80	110	125	131	136	140
50	18	33	46	86	102	110	117	117
70	5	17	26	57	77	88	94	94
80		10	19	46	65	74	82	84
90		4	14	38	55	62	70	74
100			9	31	46	54	60	66
110			4	27	40	46	53	59
120				22	34	40	45	51
130				16	28	34	40	45
140				13	24	30	35	39
150				8	20	26	30	35
160				3	16	21	20	23

4SPW5-15 (2HP DC) Solar Pumping Project

Dimensions and Weights

