




## DS 72 250M Series (72Cells) 250wp

### General Description


As a solar specialist with more than 30 years of experience in photovoltaic (PV), DuSol has made and continues to make significant contribution to undertaking groundbreaking progress in solar technology. DuSol photovoltaic modules are designed for applications with high power requirements. These quality MONO-PERC modules produce a continuous, reliable yield, even under demanding operational conditions. All DuSol DS series modules offer system integration configurations which are optimal both technically and economically and are suitable for installations in on and off-grid PV systems.

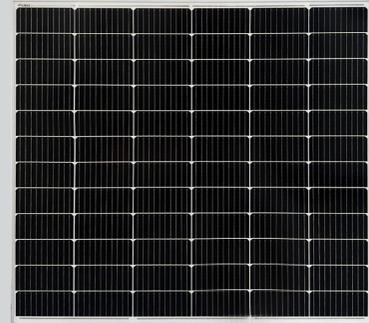

### Future

High-performance photovoltaic modules made of MONO-PERC (182x85)mm<sup>2</sup> silicon DuSol solar cells with module efficiencies of 20.5% or higher.

- 10 busbar technology for enhancing the power output.
- Anti-reflex coating to increase light absorption.
- Production controlled positive power tolerance from 0 to +5%.
- Only modules will be delivered that have specific power or more for high energy yield.
- Delivery of modules in 5watt intervals.
- Improved temperature coefficient to reduce power losses at higher temperatures.
- High power performance even at lower irradiation.

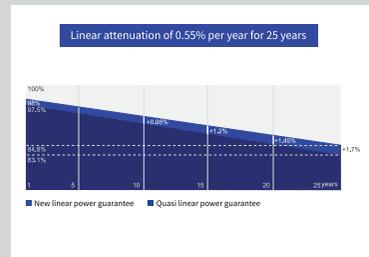

### Quality PV Modules from DuSol

Continual checks guarantee a consistently high level of quality. Every module undergoes visual, mechanical, and electrical inspection. This is recognizable by

- 10 years product guarantee.
- 25 years linear performance guarantee.
- Minimum 97% of the specified minimum power output during the first year.
- Modular design gives the end customers the power of choice of capacity
- Compatible with most of the available Hybrid inverters
- Maximum 0.55% annual reduction of the power output for the following 25 years.



### Certificates and approvals

All modules are tested and Certified according to

- IED/EN 61215 and IEC/EN 61730, Application class A
- Protection class / CE
- ISO9001 (DAC)

## Electrical Specification (STC)

### DS72250M

Nominal Power	Pmax	250W
Open-circuit Voltage	Voc	48.96V
Short Circuit Current	Isc	6.25A
Voltage at Maximum Power	Vmpp	41.68V
Maximum Power Current	Impp	6.00A
Efficiency Module	n	20.22%

STC Standard Test Conditions: Irradiance 1,000W/m<sup>2</sup>, AM 1.5, Cell Temperature 25°C. Rated Electrical Characteristics are within + % of the indicated values of Isc, Voc, and 0 to 5% of Pmax (power measurement tolerance ± 5%).

## Electrical Specification (NOCT)

### DS72250M

Nominal Power	Pmax	184.78W
Open-circuit Voltage	Voc	45.23V
Short Circuit Current	Isc	5A
Voltage at Maximum Power	Vmpp	37.94V
Maximum Power Current	Impp	4.87A
Cell Tem (°C)	T deg	47.5°C

NOCT (47.5°C): Module operating temperature at 800 W/m<sup>2</sup> irradiance, air temperature of 20°C, wind speed of 1 m/s

## Limits

Max Permissible System Voltage	1000VDC
Max Reverse Current	25A
Operating Tem	(-40 to +85) deg C
Max Mechanical Load	2400 N/m <sup>2</sup>



## Mechanical Data

Length	1134mm(+ / -3.0 mm)
Width	1100mm(+ / -2.0mm)
Depth	30mm(+/-0.8mm)
Weight	12kg


## Temperature Co-efficient

Pmax	(-0.34) %/°C
Voc	(-0.27) %/°C
Isc	(+0.045) %/°C

## Characteristics

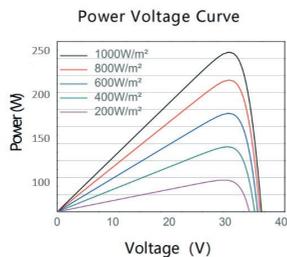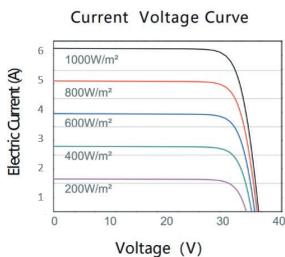

## Rear View

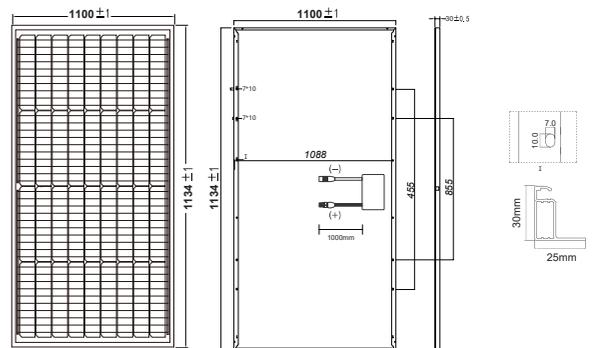

## General Data

Cell Type	Mono-PERC 10BB Cells (182x85)mm <sup>2</sup> 72 cells in series
Front Glass	Tempered Low Iron Pattern Glass, 3.2mm
Module Frame	Anodized Aluminium, Silver
Connection Box	PPO Plastic, IP68, 3by pass diodes
Cable	4mm <sup>2</sup> , Length 1000mm
Connector	SMK (MC4 compatible), Typ CCT 9901-2361F/2451F (katalognr. P51-7H/R51-7), IP67

## Registration

DuSol Solar guarantees the safety, quality and value of your product over many years the only thing we ask you to do is to register your modules with the serial number, so that we can send you the guarantee certificate to register your modules quickly and easily at [www.DuSol.ae](http://www.DuSol.ae)

SCAN HERE

