



DS36 MONO Series (36 Cells) 155wp



General Description


As a solar specialist with more than 30 years of experience in photovoltaic (PV), DuSol has made and continues to make significant contribution to undertaking ground-breaking progress in solar technology. DuSol photovoltaic modules are designed for applications with high power requirements. These quality MONO-PERC modules produce a continuous, reliable yield, even under demanding operational conditions. All DuSol DS series modules offer system integration configurations which are optimal both technically and economically and are suitable for installations in on and off-grid PV systems.




Future

High-performance photovoltaic modules made of MONO (90x182)mm² silicon DuSol solar cells with module efficiencies of 20.5% or higher.

- 10 busbar technology for enhancing the power output.
- Anti-reflex coating to increase light absorption.
- Production controlled positive power tolerance from 0 to +5%.
- Only modules will be delivered that have specific power or more for high energy yield.
- Delivery of modules in 5watt intervals.
- Improved temperature coefficient to reduce power losses at higher temperatures.
- High power performance even at lower irradiation.

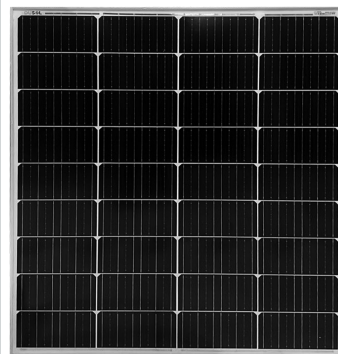

Linear attenuation of 0.55% per year for 25 years



Quality PV Modules from DuSol

Continual checks guarantee a consistently high level of quality. Every module undergoes visual, mechanical, and electrical inspection. This is recognizable by

- 10 years product guarantee.
- 25 years linear performance guarantee.
- Minimum 97% of the specified minimum power output during the first year.
- Modular design gives the end customers the power of choice of capacity
- Compatible with most of the available Hybrid inverters
- Maximum 0.55% annual reduction of the power output for the following 25 years.



Desert sand storm
test passed
(MITC INTERCERT)



Salt spray test
passed



Certificates and approvals

All modules are tested and Certified according to

- IED/EN 61215 and IEC/EN 61730, Application class A
- Protection class / CE
- ISO9001 (DAC)



Electrical Specification (STC)

DS36155M

Nominal Power	P _{max}	155W
Open-circuit Voltage	V _{oc}	23.5V
Short Circuit Current	I _{sc}	8.43A
Voltage at Maximum Power	V _{mpp}	19.8V
Maximum Power Current	I _{mpp}	7.82A
Efficiency Module	n	22.8%

STC Standard Test Conditions: Irradiance 1,000W/m², AM 1.5, Cell Temperature 25°C. Rated Electrical Characteristics are within+ % of the indicated values of I_{sc}, V_{oc}, and 0 to 5% of P_{max} (power measurement tolerance ± 5%).



Electrical Specification (NOCT)

DS36155M

Nominal Power	P _{max}	114.16W
Open-circuit Voltage	V _{oc}	21.63V
Short Circuit Current	I _{sc}	6.74A
Voltage at Maximum Power	V _{mpp}	17.95V
Maximum Power Current	I _{mpp}	6.35A
Cell Tem (°C)	T deg	47.5°C

NOCT (47.5°C): Module operating temperature at 800 W/m² irradiance, air temperature of 20°C, wind speed of 1 m/s



Limits

Max Permissible System Voltage	1000VDC
Max Reverse Current	10A
Operating Tem	(-40 to +85) deg C
Max Mechanical Load	2400 N/m ²



Mechanical Data

Length	880mm(+ / -3.0 mm)
Width	770mm(+ / -2.0mm)
Depth	30mm(+/-0.8mm)
Weight	6.8kg




Temperature Co -efficient


P _{max}	(-0.34) %/°C
V _{oc}	(-0.27) % / °C
I _{sc}	(+0.045) % / °C



Characteristics

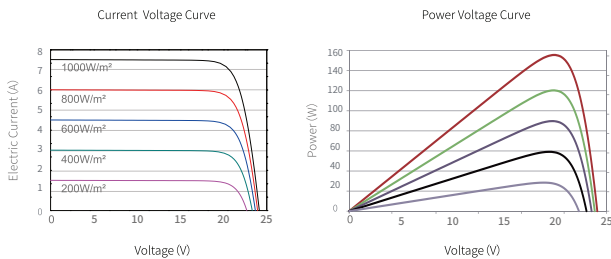

Rear View

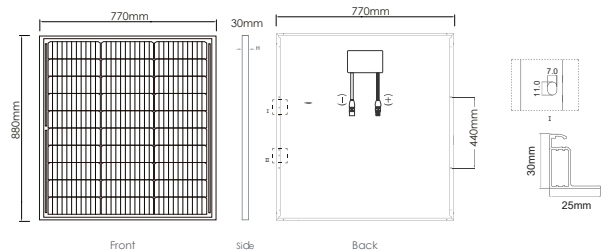

General Data

Cell Type	Mono Cells (90x182)mm ² , 36 cells in series
Front Glass	3.2mm low iron high tempered glass, AR coated
Module Frame	Anodized Aluminium, Silver
Connection Box	PPO PA, bypass diodes
Cable	0.9m Length 4sqm
Connector	MC4 connector, typ CCT 9901-2361F/2451F (katalognr. P51-75=H/R51-7), IP67



Registration

DuSol Solar guarantees the safety, quality and value of your product over many years the only thing we ask you to do is to register your modules with the serial number, so that we can send you the guarantee certificate to register your modules quickly and easily at www.DuSol.ae

SCAN HERE



www.DuSol.ae

Superior Durability , High Efficiency

Address: Office # 5,6 & 7 - States Building, Next to Mount Royal Hotel, Baniyas square, DEIRA, Dubai

PO Box: 381057 United Arab Emirates

Phone: +971-4-2231185 Fax: +971-4-2271505

Email: Info@dusol.ae URL: ww.Dusol.ae