

Solar pumping System

Note:

MAXIMA solar motor powers the new system for the supply of clean water based on the most widely available renewable energy, the sun. It is designed for easy use and requires no maintenance. It is the ideal solution for supplying water in remote areas, where the normal power supply of electricity from the power grid is inconsistent or completely unavailable


Parameter

Location:	UAE	Water Temp:	25°C		
Required daily output:	10m ³ /day	Dirt loss:	3%	Motor lenght:	50
Pipe type:	Plastic	Static Head:	10m	Pipe length:	20m


Products

Submersible pump	1pc;4SPW5-8A (1800W AC&DC)
Solar panel	6pc;1800Wp;300w × 6pcs
Motor cable	
Pipeline	20m;Pipeline
Accessories	


Daily output in average month (49.9) m³/day

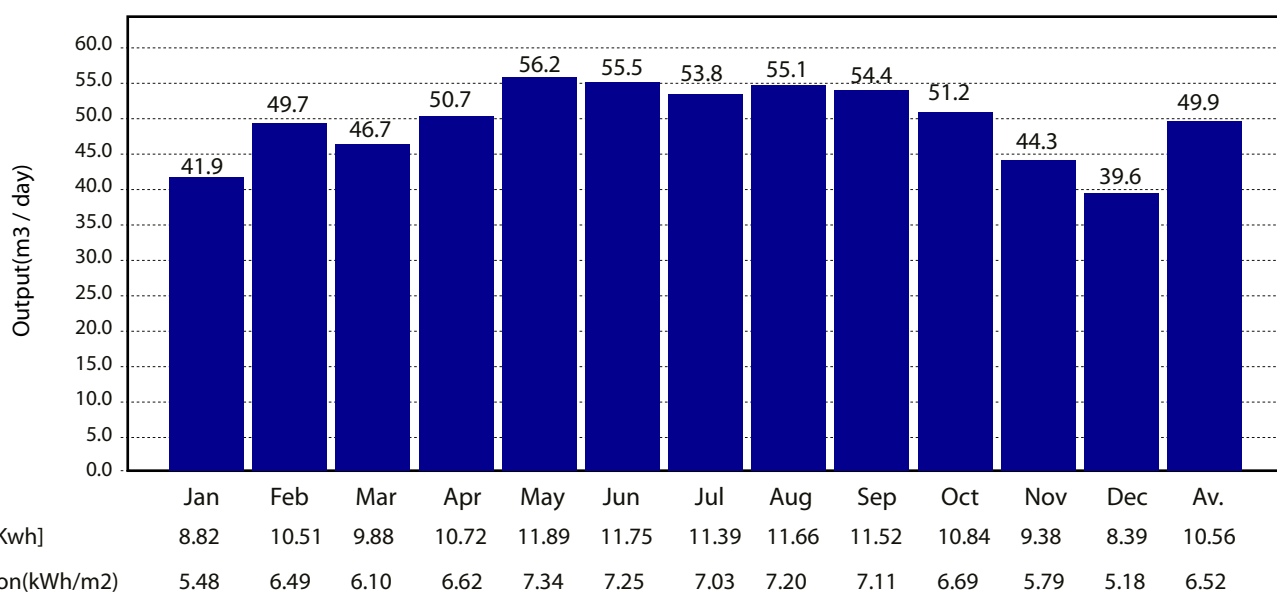

Solar Panel Wiring

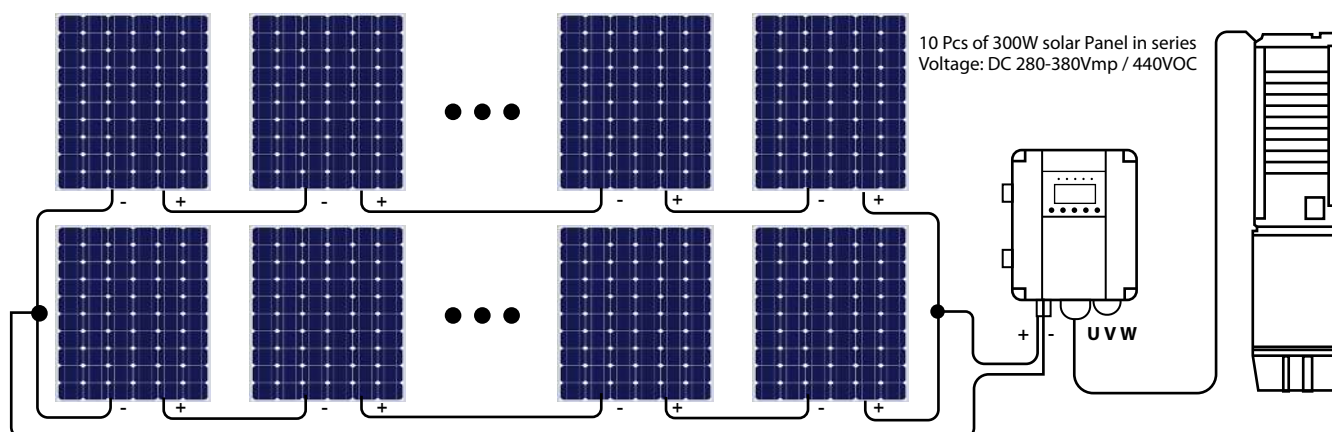


Sizing Layout

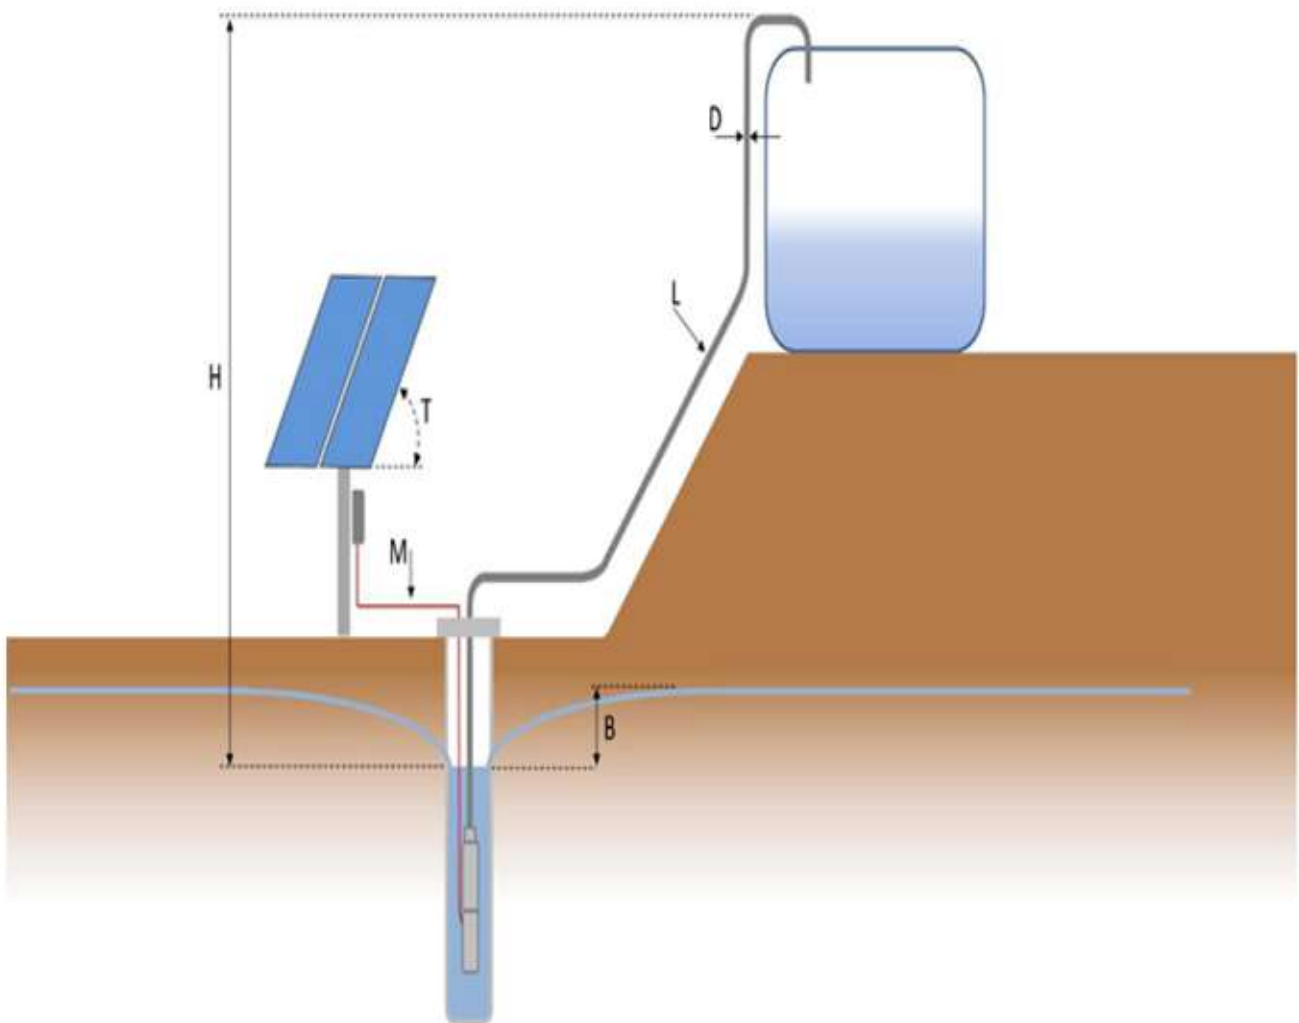

H (Static head):	Vertical height from the dynamic water level to the highest point of delivery..
B (Drawdown):	Lowering of water level depending on flow rate and recovery rate of the well.
D (Pipeline inner diameter):	
L (Pipe length):	Entire pipeline from the pump outlet to the point of delivery. Ellbows and armatures must be added as an equivalent length of pipeline.
M (Motor cable):	The cable between controller and pump unit.
T (Tilt angle):	Angle of the PV generator surface from the horizontal plane.

System Layout

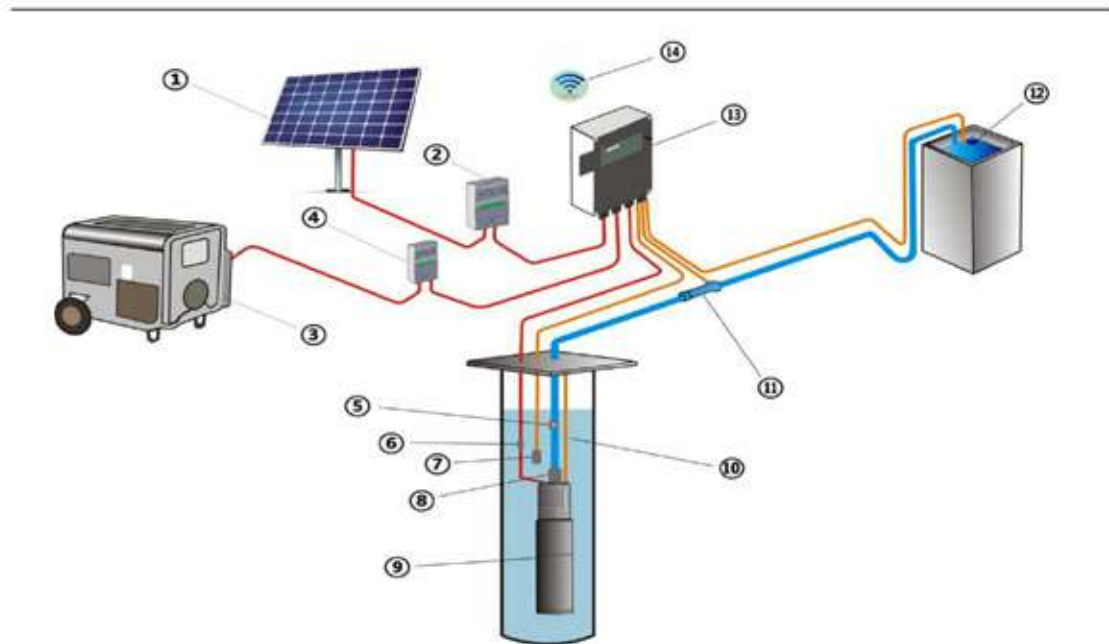

- | | |
|--|--------------------------------|
| 1. Solar panels | 8. Sacrificial Anode(optional) |
| 2. SPD(DC) Surge Protection Device(optional) | 9. Solar water pump |
| 3. Generator or Grid (optional) | 10. Traction rope |
| 4. SPD(AC) Surge Protection Device (optional) | 11. Flow meter(optional) |
| 5. Check valve (optional) | 12. Float Switch (For Tank) |
| 6. Wiring Package(Epoxy Resin Wiring Package or Heat Shrinkable Tube Wiring Package) | 13. Monitor(optional) |
| 7. Float Switch (For Dry Protection, Optional) | 14. GPRS (optional) |

NOTE

1. Please read the manual carefully for all installation accessories, Please contact factory if you need all the above accessories.
2. Float Switch for Dry Protection is Optional, Because the pump system has its own dry protection;
3. Monitor is not a necessary part of pump system .but it provides more functions and protections for pump system. Making the system more convenient and intelligent. For example intelligent switching of AC/DC power supply; Floating ball interface terminal etc.
4. The pump shall be installed at least 1.5m away from the bottom of the well:
5. It is recommended to install a check valve every 70m of the vertical height of the pipeline.

4SPW5-8A (1800W AC&DC)

Solar Submersible Pump System

System Overview

Head	max. 92m
Flow	max 157L/min
Recommend Max Input Power	max. 1.8 kW
Minimum well diameter	min 4 inch
Pump discharge	Rp 1.25"
Efficiency Max	45%

Product advantage

Stainless steel: AISI 304
 BLDC High Efficiency Motor,
 External Controller:
 Only could powered by DC power:
 Voltage/Current/Power/Rpm/Controller temperature Display
 Encapsulated water filled motor (No pollution risk):
 Soft start running makes system's life longer:
 Thrust bearing system
 Reverse protection (reverse + and - is fine):
 Over load protection/over current protection/over power protection:
 Wide voltage: 90-380V mp/440VOC:
 Dry protection(No additional float sensor required):
 Dry protection(No additional float sensor required):
 GPRS(Optional):

Technical Data:

Controller 4SPW5-8A (1800W AC&DC)

Controller Model 4SPW-A-1800W
 MPPT Efficiency Max. 98%
 Voltage 60-380Vp/450VOC : AC 150-240V 50Hz&60Hz
 Enclosure class: IP65
 Error Report
 Lacking-Phase protection
 Over temperature protection;

Motor 4SPW-A. (1800W AC&DC)

Voltage	AC 150-240V DC max. VOC 450V DC Vmp 60-380V
Current	max. AC10A max. DC 10A
Motor Efficiency	max 85%
WaterTemp	max40°C
Insulation class	F
Enclosure class	IP X8
Submersion	max. 150m
Speed	500-4000



Pump End

Stainless steel: AISI 304 ;
 Non-return valve:
 Centrifugal pump

Standards



Note:

*Accept 2-10 PCS 340W Panel best 5-6Pc


*The Controller is IP65 Rated however it is recommended that it is not mounted in direct sunlight

*VOC (V) Volts open circuit nothing connected;Vmp (V) Volts maximum power point under load;Exceeding limits may cause serious harm or irreparable damage.

4SPW5-8A (1800W AC&DC)

Solar Pumping Project

Pump Chart

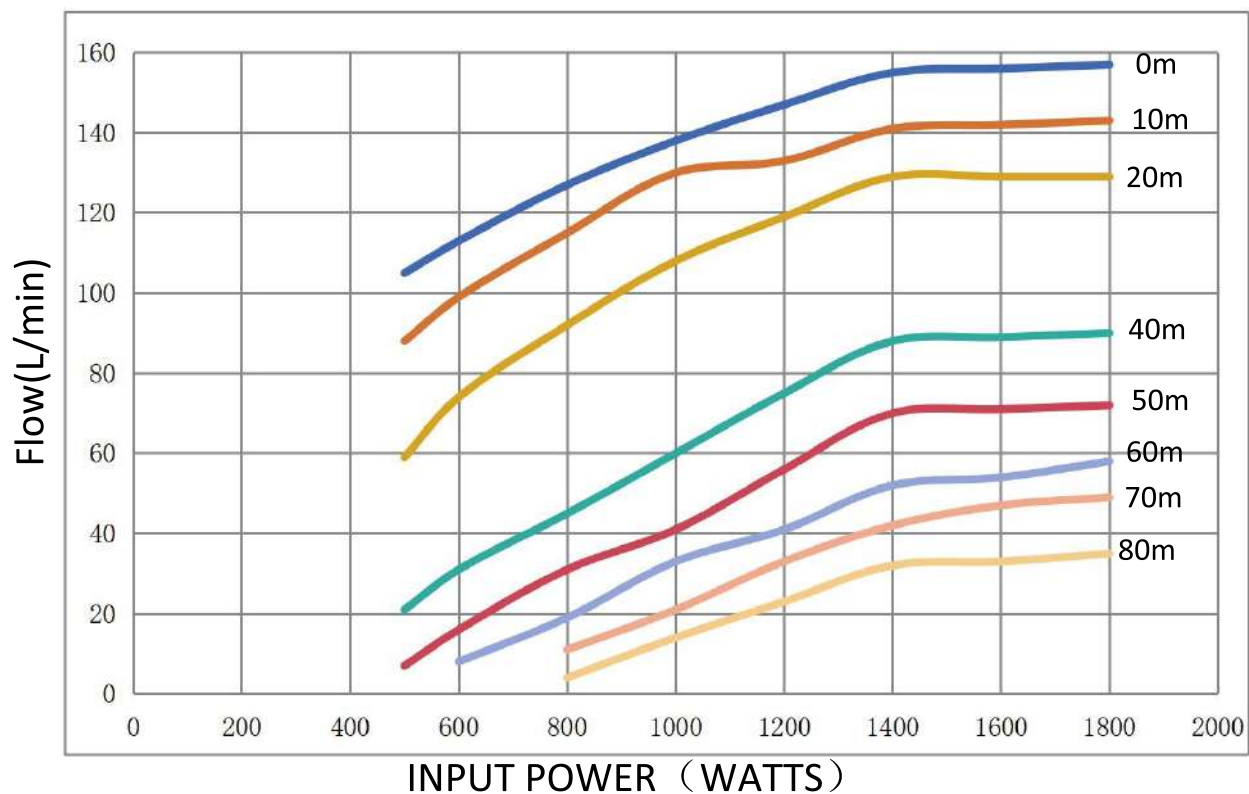

HEAD (m)	INPUT POWER (WATTS)							
	500	600	800	1000	1200	1400	1600	1800
	Flow (L/min)							
0	105	113	127	138	147	155	156	157
10	88	99	115	130	133	141	142	143
20	59	74	92	108	119	129	129	129
40	21	31	45	60	75	88	89	90
50	7	16	31	41	56	70	71	72
60		8	19	33	41	52	54	58
70			11	21	33	42	47	49
80			4	14	23	32	33	35

4SPW5-8A (1800W AC&DC) Solar Pumping Project

Dimensions and Weights

