



Deutsche  
Qualität  
Garantiert



# CME-132 680W-700W

More power, less degradation

**22.57%**  
MAXIMUM EFFICIENCY

**132**  
HALF CELLS


**30 YEARS** Performance Warranty      up to **30 YEARS\*** Product Warranty

\*The regular product warranty is 15 years, please refer to the latest version of AESOLAR Limited Warranty for the duration of the product warranty under special conditions. for extensions, please contact AESOLAR staff.

- LID RESISTANT
- PID RESISTANT
- SALT CORROSION RESISTANT
- SAND RESISTANT
- AMMONIA RESISTANT
- HIGHLY STABLE AND TOUGH



## OUR PERFORMANCE WARRANTY

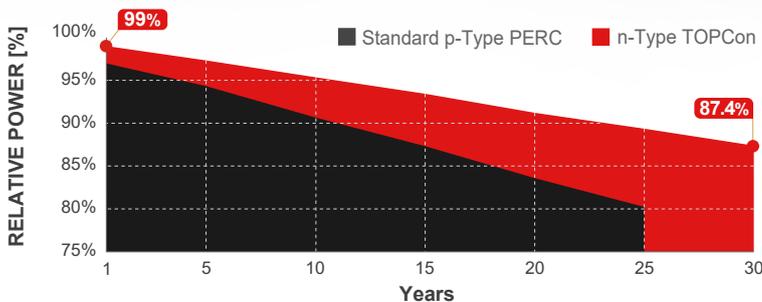

## SYSTEM AND PRODUCT CERTIFICATIONS



IEC 61215 IEC 61730  
Regular Production Surveillance


www.tuv.com  
ID 1111251295



www.ae-solar.com

# AE CME-132 680W-700W

N-TYPE TOPCON TECHNOLOGY PV MODULE

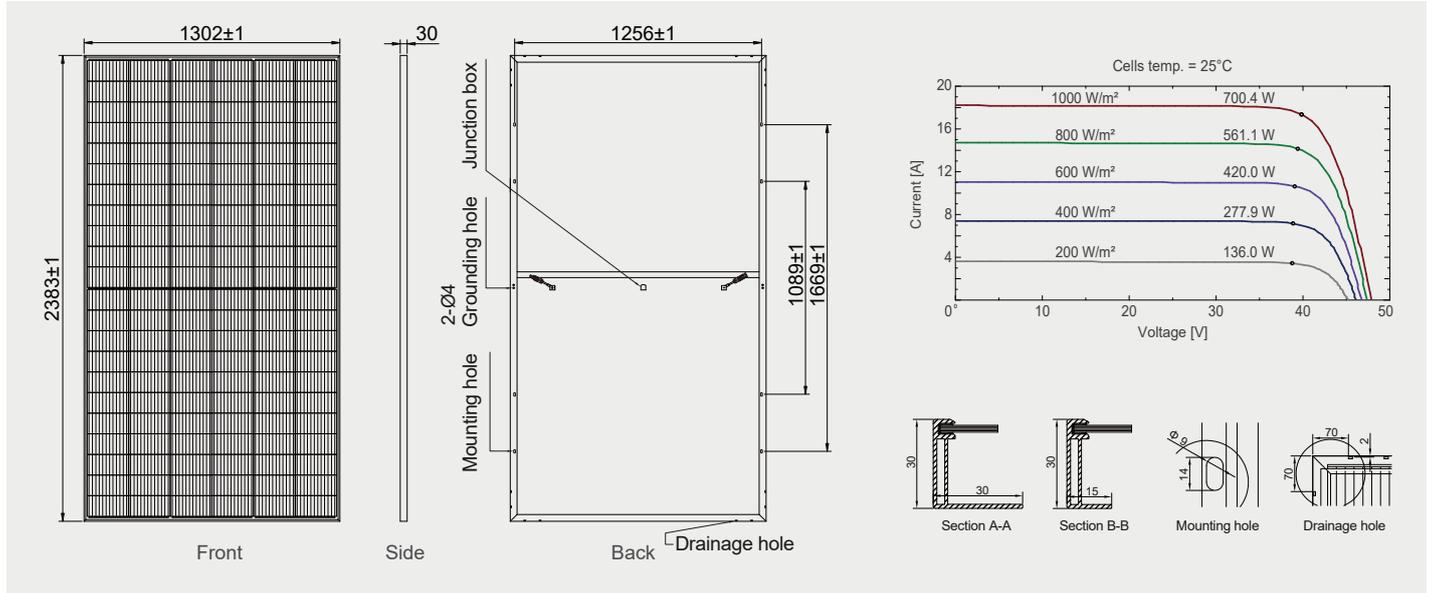

## Electrical specifications (STC\*):

Nominal max. Power	$P_{max}$ (Wp)	680	685	690	695	700
Maximum operating voltage	$V_{MPP}$ (V)	39.65	39.85	40.10	40.30	40.52
Maximum operating current	$I_{MPP}$ (A)	17.16	17.19	17.23	17.25	17.28
Open-circuit voltage	$V_{oc}$ (V)	47.40	47.70	47.90	48.10	48.30
Short-circuit current	$I_{sc}$ (A)	18.18	18.21	18.25	18.28	18.31
Module efficiency	$\eta$ (%)	21.92	22.08	22.24	22.41	22.57
Power tolerance	(W)			0~+5		
Maximum system Voltage	(V)			1500		
Maximum series fuse rating	(A)			30		

\*STC: Standard Test Conditions (irradiance 1000 W/m<sup>2</sup>, cell temperature 25°C and air mass of AM1.5), measurement tolerance Pmax: ±3%

## Electrical specifications (NMOT\*):

Nominal max. Power	$P_{max}$ (Wp)	517	521	525	529	533
Maximum operating voltage	$V_{MPP}$ (V)	37.20	37.30	37.60	37.85	38.10
Maximum operating current	$I_{MPP}$ (A)	13.91	13.94	13.97	13.98	14.00
Open-circuit voltage	$V_{oc}$ (V)	44.90	45.20	45.40	45.60	45.80
Short-circuit current	$I_{sc}$ (A)	14.65	14.67	14.71	14.75	14.79

\*NMOT: Normal Module Operating Temperature (irradiance 800 W/m<sup>2</sup>, ambient temperature 20°C, air mass of AM1.5 and wind speed of 1 m/s)

## Mechanical and design specification

Cell type	n-Type TOPCon technology, half-cut cells
No. of cells	132
Front cover	3.2 mm glass, high transmission, AR coated, tempered
Encapsulation	EVA
Back cover	White Backsheet
Junction box	IP68 rated, 3 bypass diodes
Frame	30 mm anodized aluminium alloy
Cable	1 x 4 mm <sup>2</sup> , 350 mm length or customized
Connectors	MC 4 / MC 4 compatible
Dimension	2383 mm x 1302 mm x 30 mm
Weight	31.5 kg
Hail resistance	Max. Ø 25 mm at 23 m/s
Wind load	2400 Pa or 244 kg/m <sup>2</sup>
Snow load	5400 Pa or 550 kg/m <sup>2</sup>

## Temperature ratings

Operating temperature	-40 to +85°C
Temp. coefficient of $P_{max}$	-0.29 %/°C
Temp. coefficient of $V_{oc}$	-0.24 %/°C
Temp. coefficient of $I_{sc}$	0.040 %/°C
Nom. operating cell temp. NOCT	43 ± 2°C

## Packaging information

Packaging configuration	36 pcs / pallet
Loading capacity	648 pcs / 40 HQ
Size / Pallet	1350 mm x 1140 mm x 2500 mm (Upright)
Weight	1167 kg / pallet

The specifications and characteristics contained in this datasheet may deviate slightly from our actual products due to the product developments and uncertainty of measurement devices. The specifications included in the datasheet are subject to change without prior notice.



+49 8231 978268 0  
sales@ae-solar.com  
www.ae-solar.com

**AESOLAR**  
Messerschmittring 54  
86343 Königsbrunn, Germany